


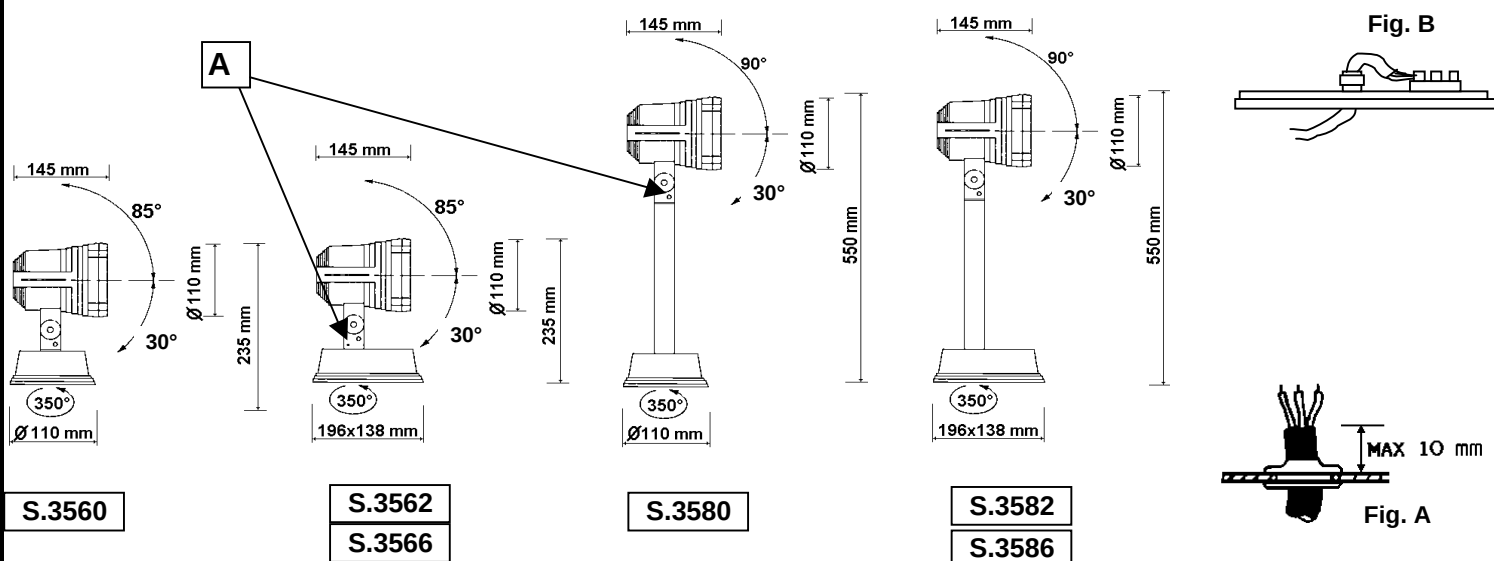

MINITECHNO

Per lampada PAR 20 50W / PAR 25 max 75W E27

Per lampada alogena B.T. QT12 50W 12V GY6,35


Per lampada a ioduri metallici HIT-TC 35W G8,5 UV-STOP



S.3560-S.3580



S.3562-S.3582



S.3566-S.3586



CARATTERISTICHE TECNICHE

Struttura in alluminio pressofuso,estruso
Diffusore in vetro temprato trasparente.
Verniciatura a polveri con alta resistenza alla corrosione
Pretrattamento di fosfocromatazione
Viti a brugola in acciaio inox A4
Portalampade a norme europee
Entrata cavi di alimentazione con pressacavi PG13,5
CLASSE I IP 65



0,5m



Mantenere almeno 0,5m di distanza tra l'apparecchio e la superficie illuminata

Per le versioni a ioduri

Sostituire gli schermi di protezione con ricambi originali SIMES



L'apparecchio deve essere utilizzato solo se completo del suo schermo di protezione

ISTRUZIONI DI MONTAGGIO

Aprire l'apparecchio rimuovendo il vetro e la base
Inserire il cavo tripolare(D.9-12mm) nel pressacavo (**Fig. A**)
Fissare la base alla superficie di montaggio lasciando le viti al di sotto della guarnizione
Eseguiere il cablaggio elettrico (**Fig. B**) e bloccare il pressacavo
Montare l'apparecchio sulla base a parete o a terra posizionando i cavi in modo che non interferiscano con la guarnizione
Inserire la lampada indicata nei dati di targa
Richiudere l'apparecchio

AVVERTENZE:

Non superare la potenza indicata nei dati di targa
La presa di terra è obbligatoria
Utilizzare cavi di alimentazione di tipo ◀HAR ▶
Togliere tensione prima di effettuare manutenzioni
In caso di rottura sostituire il diffusore prima di riutilizzare l'apparecchio
Non entrare nel pressacavo con fili singoli.
Per orientare l'apparecchio allentare il grano (A) , posizionarlo e ribloccare il grano.
Apparecchio idoneo all'uso esterno ed interno.

NOTE: MINITECHNO è un apparecchio sofisticato e deve essere installato da un elettricista qualificato




L'apparecchio è idoneo al montaggio su superfici normalmente infiammabili

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio e per la sicurezza delle persone, pertanto esse vanno conservate



apparecchi d'illuminazione

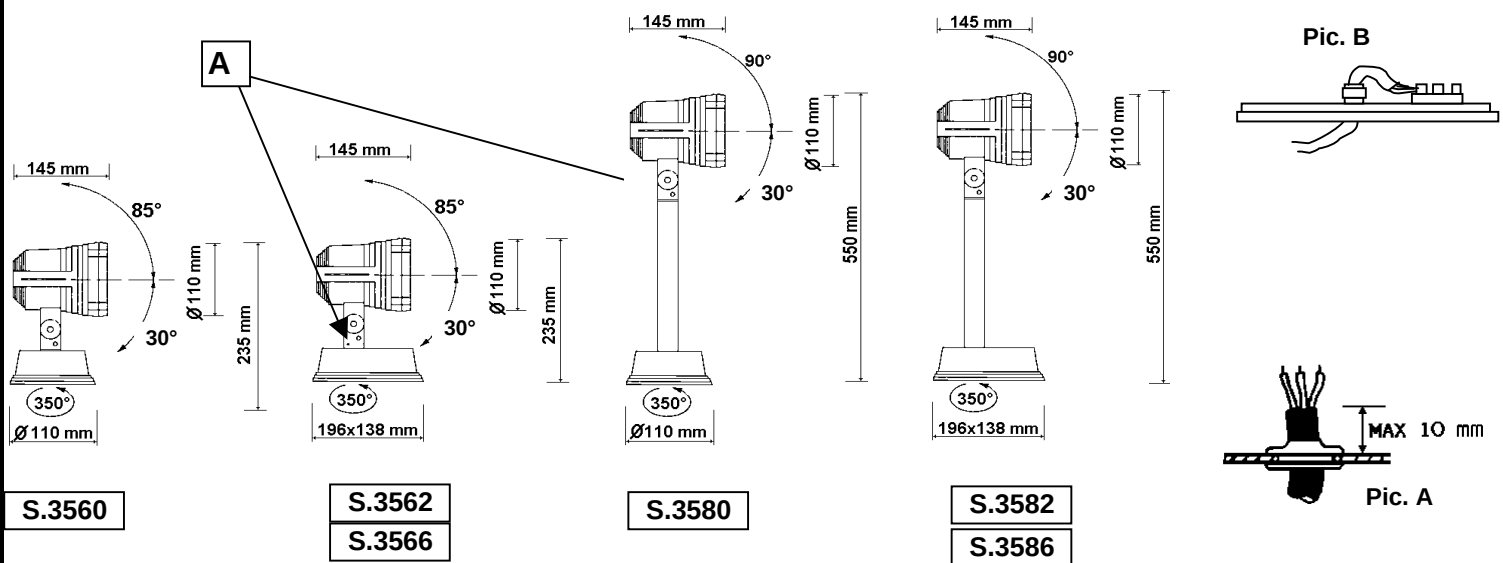

MINITECHNO

For halogen lamp PAR 20 50W / PAR25 max 75W E27

For low voltage lamp QT12 50W 12V GY6,35

For metal halide lamp HIT-TC 35W G8,5 UV-STOP



S.3560-S.3580



S.3562-S.3582




S.3566-S.3586



TECHNICAL INFORMATION:


Body in die-cast/extruded aluminium
Tempered glass diffuser. Stainless steel screws.
Pre-phosphocromatation treatment and powder paint with high corrosion resistance.
Lampholders in compliance with European Standards
Cable entry with PG13,5 cable gland
CLASS I IP 65



Minimum distance between fitting and lighted surface = 0,5m

For metal halide and halogen lamp

The protection screen must be replaced only with SIMES original spare parts.



The fitting must be used only with the protection screen.

INSTALLATION INSTRUCTIONS:

Open the fitting and remove glass diffuser and gear base
Introduce the cable(D. 9-12mm) trough the cable gland (**Pic. A**)
Fix the gear base to the mounting surface; laying the screws under the gasket
Be careful to avoid damage of the cable between the base and the gasket
Connect the wire to terminal block (**Pic. B**) and block the cable gland
Fit the fitting on the gear base at ground or at wall
Install the cable gland with the rubber ring on the gear box .
Insert the correct lamp
Close the fitting

RACOMANDATIONS:

Do not exceed the maximum wattage-see internal label
The fitting must be earthed
Use ◀HAR▶ cable
Disconnect the power before maintenance
In case of glass damage,replace it before using the fitting.
Do not enter with single wires even if protected with plastic tape
They have to be separated inside the fitting
To regulate the fitting unscrew the A screw, put it in right position and block the A screw.
The article is suitable for outside and inside use.



The fitting is suitable to the mounting on normal inflammable surfaces

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations



apparecchi d'illuminazione

ISTRMINITECH REV.7 09/07