

EASY KAP 80 SQUARE ADJUSTABLE OPTIC SPOT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Diffusing lens included

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	18°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali Without
Emergency	Without
Insulation class	Class III

PHYSICAL


Recessed depth (mm)	90
Construction material	Die-cast aluminum
Weight (kg)	0,24


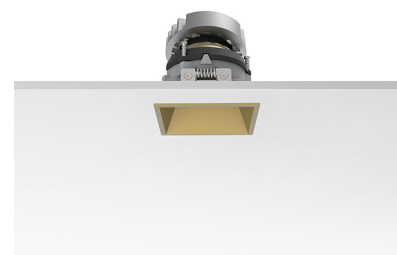


Easy Kap 80 Square Adjustable Optic Spot


designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

	03.4294.GL - 675lm	Gold
	03.4294.B1 - 690lm	White
	03.4294.BU - 630lm	Blue
	03.4294.74 - 630lm	Black
	03.4294.CU - 661lm	Copper

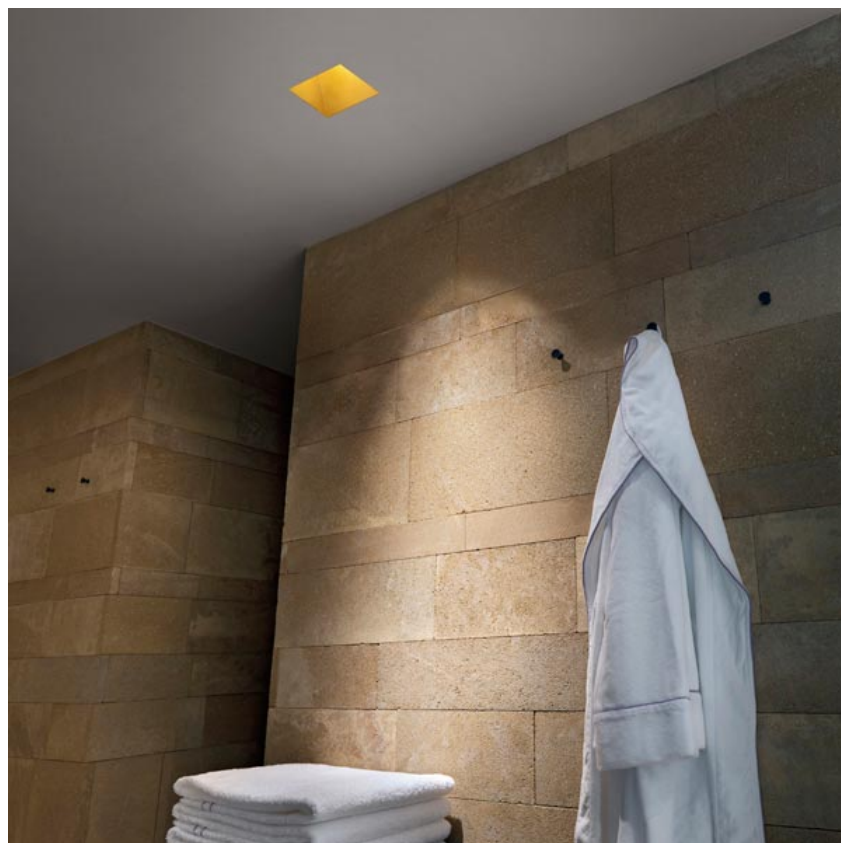

CERTIFICATIONS

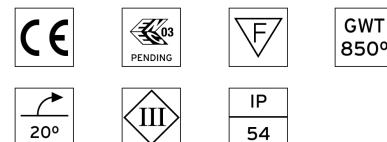

Easy Kap 80 Square Adjustable Optic Spot . Accessories

Power Supply



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8847

Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15




60.8880

Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm² secondary conductor (m): 50

Maximum length of 2.5 mm² secondary conductor (m): 50

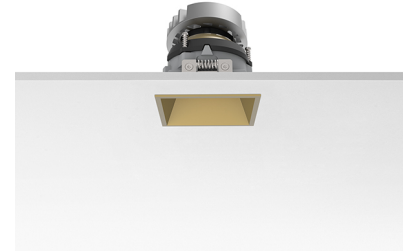


Easy Kap 80 Square Adjustable Optic Spot

designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

	03.4294.GL - 675lm	Gold
	03.4294.B1 - 690lm	White
	03.4294.BU - 630lm	Blue
	03.4294.74 - 630lm	Black
	03.4294.CU - 661lm	Copper



CERTIFICATIONS



Easy Kap 80 Square Adjustable Optic Spot . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array

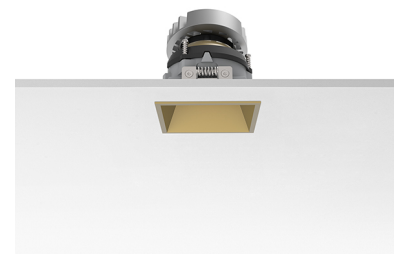


Easy Kap 80 Square Adjustable Optic Spot

designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

- 03.4294.GL - 675lm Gold
- 03.4294.B1 - 690lm White
- 03.4294.BU - 630lm Blue
- 03.4294.74 - 630lm Black
- 03.4294.CU - 661lm Copper



CERTIFICATIONS

