

## EASY KAP 80 SQUARE ADJUSTABLE OPTIC FLOOD

|                                |  |
|--------------------------------|--|
| <b>Number of heads</b>         | 1  |
| <b>Mounting</b>                | Ceiling recessed                             |
| <b>Lamps description</b>       | LED Array DC 500 mA 9,2W 810 lm 3000K CRI 90 |
| <b>Luminaire luminous flux</b> | Extreme Cut-off. See reference number        |
| <b>Environment</b>             | Indoor                                       |
| <b>Notes</b>                   | Diffusing lens included                      |

### OPTICAL



|                                    |            |
|------------------------------------|------------|
| <b>Aiming</b>                      | Adjustable |
| <b>Light distribution symmetry</b> | Symmetric  |
| <b>Beam angle</b>                  | 53°        |

### ELECTRICAL

|                                 |  |
|---------------------------------|--|
| <b>Transformer availability</b> | Separate item  |
| <b>Transformer mounting</b>     | Remote   |
| <b>Transformer type</b>         | Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali |
| <b>Emergency</b>                | Without  |
| <b>Insulation class</b>         | Class III  |

### PHYSICAL

|                              |                   |
|------------------------------|-------------------|
| <b>Recessed depth (mm)</b>   | 90                |
| <b>Construction material</b> | Die-cast aluminum |
| <b>Weight (kg)</b>           | 0,24              |

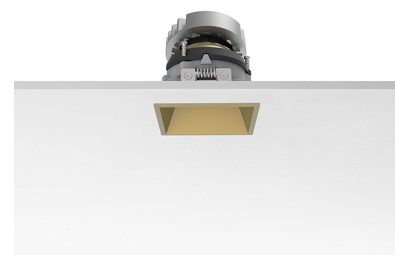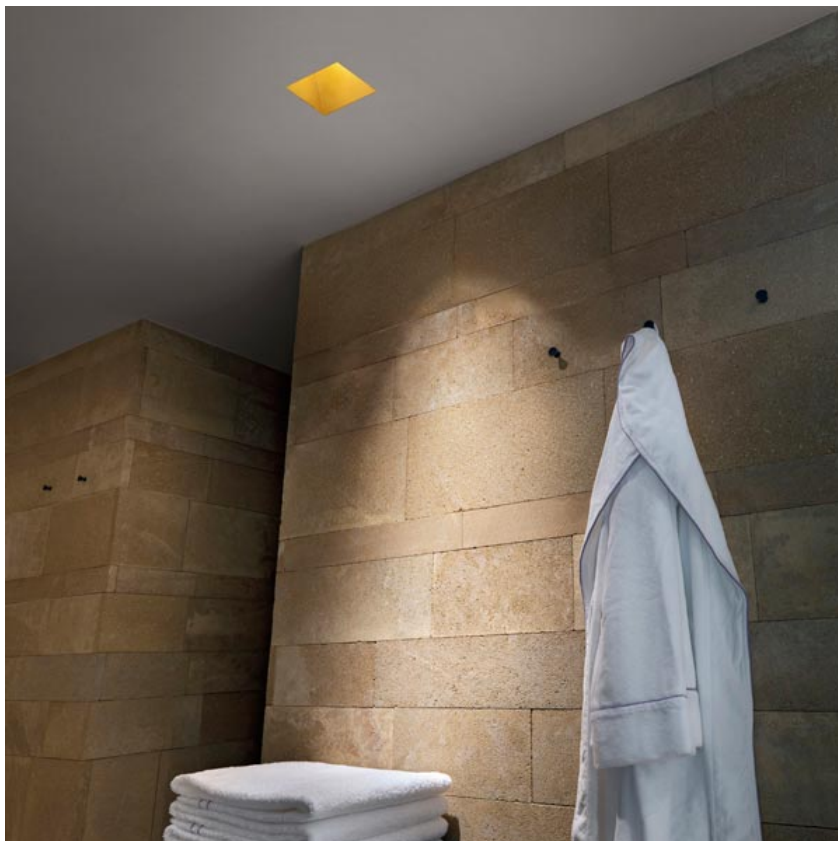


### Easy Kap 80 Square Adjustable Optic Flood

designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

|                    |        |
|--------------------|--------|
| 03.4295.GL - 678lm | Gold   |
| 03.4295.B1 - 702lm | White  |
| 03.4295.BU - 631lm | Blue   |
| 03.4295.74 - 625lm | Black  |
| 03.4295.CU - 664lm | Copper |

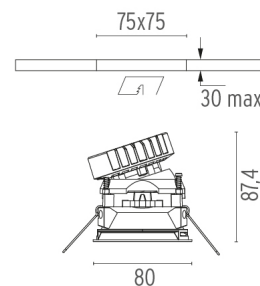

### CERTIFICATIONS



## Easy Kap 80 Square Adjustable Optic Flood . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8847

#### Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15




60.8880

#### Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 50

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50

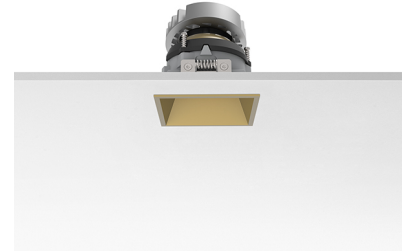


#### Easy Kap 80 Square Adjustable Optic Flood

designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

|                    |        |
|--------------------|--------|
| 03.4295.GL - 678lm | Gold   |
| 03.4295.B1 - 702lm | White  |
| 03.4295.BU - 631lm | Blue   |
| 03.4295.74 - 625lm | Black  |
| 03.4295.CU - 664lm | Copper |

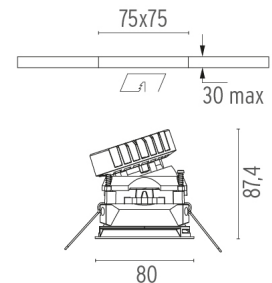

### CERTIFICATIONS



## Easy Kap 80 Square Adjustable Optic Flood . Lamps



### LED Array

### Lamp category:


LED

### Socket:

Special base

### Lamp type:



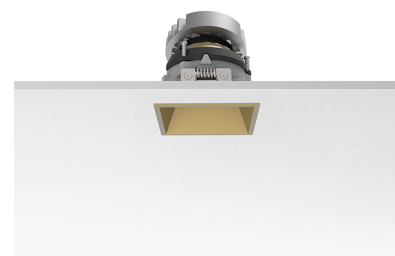


LED Array




### Easy Kap 80 Square Adjustable Optic Flood

designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

|   |                    |        |
|---|--------------------|--------|
|    | 03.4295.GL - 678lm | Gold   |
|    | 03.4295.BI - 702lm | White  |
|    | 03.4295.BU - 631lm | Blue   |
|   | 03.4295.74 - 625lm | Black  |
|  | 03.4295.CU - 664lm | Copper |

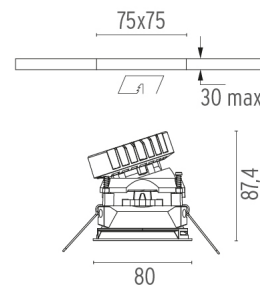

### CERTIFICATIONS

