

## KAP 80 SQUARE ADJUSTABLE OPTIC SPOT

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array DC 500 mA 9,2W 810 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Diffusing lens included. Fast&Perfect pre-installation frame to be ordered separately.

### OPTICAL


<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	18°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III



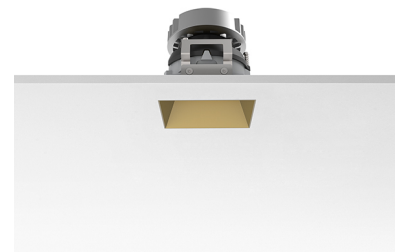


### PHYSICAL



<b>Recessed depth (mm)</b>	93
<b>Construction material</b>	Die-cast aluminum
<b>Weight (kg)</b>	0,24




**Kap 80 Square Adjustable Optic Spot** designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

	03.4542.GL - 600lm	Gold
	03.4542.B1 - 718lm	White
	03.4542.BU - 655lm	Blue
	03.4542.74 - 656lm	Black
	03.4542.CU - 687lm	Copper

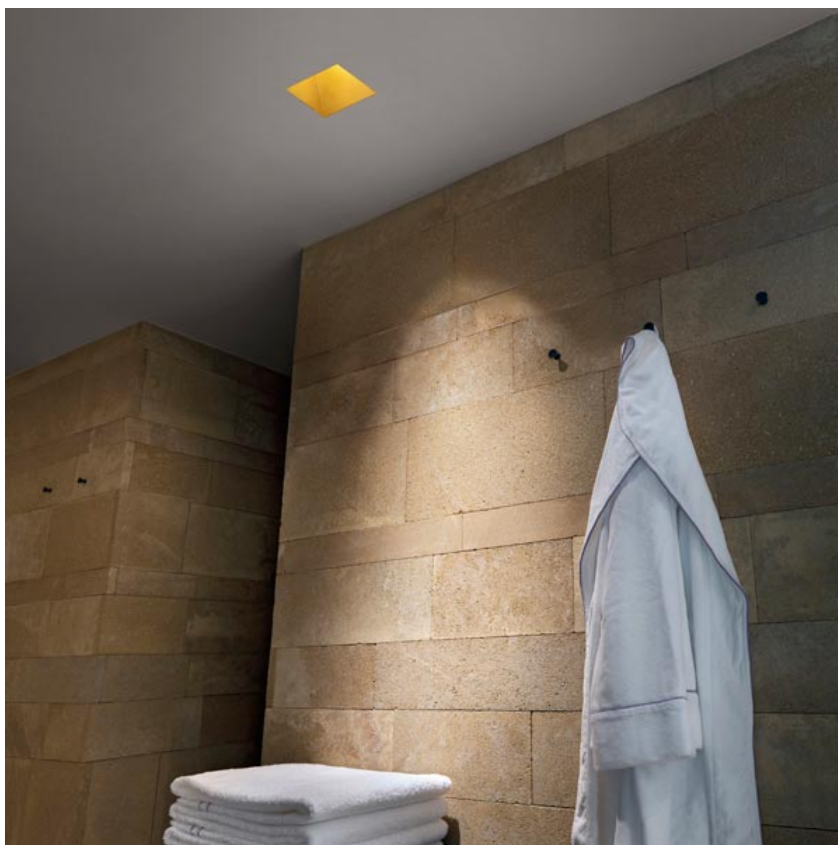

### CERTIFICATIONS

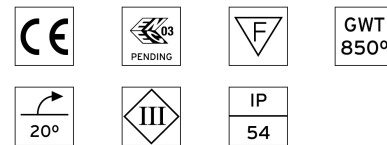

## Kap 80 Square Adjustable Optic Spot . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533



#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15




60.8847

#### Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15

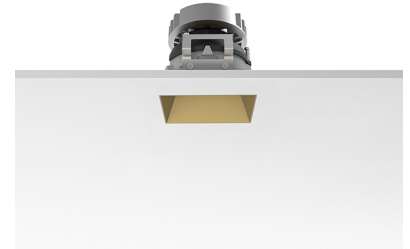

**Kap 80 Square Adjustable Optic Spot** designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4542.GL - 600lm	Gold
03.4542.B1 - 718lm	White
03.4542.BU - 655lm	Blue
03.4542.74 - 656lm	Black
03.4542.CU - 687lm	Copper



60.8880

#### Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 50

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50

### CERTIFICATIONS



## Kap 80 Square Adjustable Optic Spot . Accessories

### Mounting




08.9103.00

**Installation frame No Trim**



08.9101.00

**Fast&Perfect tool ø153**

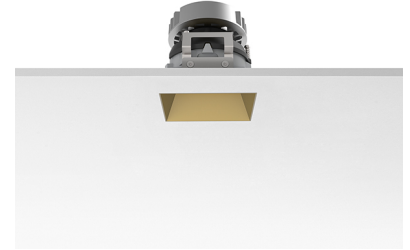

**Kap 80 Square Adjustable Optic Spot**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

- 03.4542.GL - 600lm      Gold
- 03.4542.B1 - 718lm      White
- 03.4542.BU - 655lm      Blue
- 03.4542.74 - 656lm      Black
- 03.4542.CU - 687lm      Copper

## Kap 80 Square Adjustable Optic Spot . Lamps



### LED Array

**Lamp category:**


LED

**Socket:**

Special base

**Lamp type:**

LED Array



### CERTIFICATIONS

