

- PENDANTS: one
- MOUNTING: metal mounting plate 55mm (2.2') in diameter
- LAMPING: 1.5w LED or 20w xenon
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, electrical components, metal mounting plate
- WEIGHT: approximately 1kg (2lb)
- TRANSFORMERS: remote mounted. Transformers included

DESCRIPTION

The 's' designation in this variation on the 28 refers to it being surface-mounted, with transformers mounted remotely. This surface light has a discrete 55mm (2.2') mounting plate designed for installation on walls or ceilings.

28 is an exploration of specificity in manufacturing. Instead of designing form itself, here the intent was to design a system of making that yields form. Individual 28 pendants result from a complex glass blowing technique whereby air pressure is intermittently introduced into and then removed from a glass matrix which is intermittently heated and then rapidly cooled. The result is a distorted spherical shape with a composed collection of imploded inner shapes, one of which acts as a shade for the light source.

Standard 28s are made with clear glass exterior spheres and milk white interior lamp holder cavities. 28s are possible with infinite versatility in colour compositions, sizes and shapes.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + Unless otherwise noted when ordering, all fixtures will be outfitted to be xenon compatible
- + Transformers must be remote mounted

US Patent # D687,740
EU Patent # 001695834-001 to 004

Made in Vancouver, Canada

Vancouver
sales@bocci.ca
www.bocci.ca

Berlin
europa@bocci.ca
www.bocci.ca


approx 1kg (2lb)



SURFACE LIGHT

28s

Design by Omer Arbel
PRODUCT SPECIFICATION



1


Mount transformer remotely and route output wiring from transformer to surface mounted light location.

Xenon (110V) or LED: connect the black wire to black and white wire to white wire.

Xenon (230V): connect black wire to brown wire and white wire to blue wire.

For multiple surface mount installations, ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.


Note: Standard junction boxes are not compatible with the 28s. The surface mounted light back plate mounts directly to the wall. Transformers must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

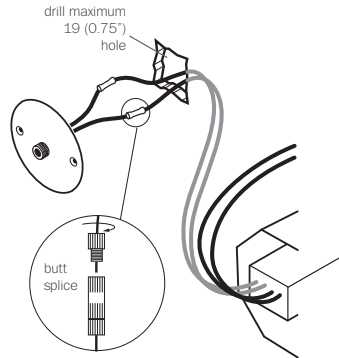

2

Drill a maximum 19mm (0.75") diameter hole.

Join transformer wiring to back plate wiring using #16 butt splices, provided (stagger the splices).



3


Tuck wiring into wall opening and affix the back plate with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.

Bocci LED or xenon lamps included.


Plug the lamp into the socket.

Do not touch the lamp with your bare hands.



4

Gently thread glass sconce onto back plate. Do not tighten past the point of contact.



5

Clean fingerprints from glass surfaces.

Turn fixture on.

For additional assistance, please contact Bocci:

Vancouver
sales@bocci.ca
www.bocci.ca

Berlin
europe@bocci.ca
www.bocci.ca

US Patent # D687,740
EU Patent # 001695834-001 to 004

Made in Vancouver, Canada

