

## PRODUCT DATA SHEET

### Recessed Soft Light - TC-LEL 2x55W dimmable DALI - 600x600

**DESIGN BY :**

Ernesto Gismondi

**MATERIALS :**

Galvanised Steel

**DESCRIPTION :**

A range of recessed luminaires for fluorescent lamps. Suitable for installation into false ceiling systems with 600x600 mm or 625x625 mm modules, or into plasterboard false ceilings using a special recessing frame (optional). IP40 protection index, guaranteed by the use of a screen-printed tempered glass, ensuring a lasting optical performance over time by improving maintenance and preventing dust accumulation, thus minimising the depreciation factor. Complies with standard EN60598-1 and other specific standards.

False ceiling : 600x600mm

**Light emission**

Direct



#### TECHNICAL DATA SHEET

**Features**

Product name:	Recessed Soft Light - TC-LEL 2x55W dimmable DALI - 600x600
Article Code:	M160401
Colour:	N/s
Material:	Galvanised Steel
Series:	Architectural
Environment:	Indoor
Area contract:	

**OPTICS**

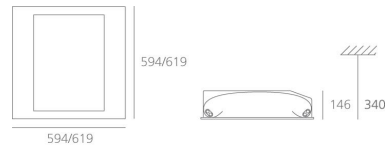
Emission:	Direct
-----------	--------

**DIMENSIONS**

Length:	(cm) 59.4
Width:	(cm) 59.4
Recessed depth:	(cm) 14.6
Cutout shape:	
Weight:	9.9
Impact Resistance:	10
Glow Wire Test:	850 °

**LAMPS NOT INCLUDED**

Category:	FLUO
Number:	2
Lbs:	TC-LEL
Watt:	55
Socket:	2G11
Type:	FSDH
Luminous Flux (lm):	4800
Colour Rendering:	85
Colour temperature (K):	3000
Duration (h):	12000

**Dimensions****LAMP****ELECTRICAL**

Starter:	Electronic dimmable DALI Integrated
Voltage:	220V-240V

## ACCESSORIES

---



Recess frame for  
installation on  
plasterboard false ceiling.  
600x600mm. M160600