

## PRODUCT DATA SHEET

### Luceri Led Java - 27W 4000K Dim. DALI - White

**DESIGN BY :**

Artemide

**MATERIALS :**

Polycarbonate

**DESCRIPTION :**

Recessed fixed round luminaires with high-efficiency LED-module with frame. Recessing ring in polycarbonate. Reflector made from technopolymers with smooth specular metallised coating with an anti-scratch protective layer. The optics system consists of a lighting chamber with integral passive thermal management system, and featured with CREE TRUE WHITE® technology, an intelligent system that guarantees a constant colour temperature and permanent colour rendering index throughout entire service life. High luminous flux: 2000 lm (27W) and 2900 lm (37W) available with warm white (3000K) and neutral white (4000K) tones. Symmetric wide-beam light distribution. CRI > 90. Reflector with glare-control: UGR < 19 conforming to EN12464-1 standard. Service life: 50000 hours at 70% luminous flux. Spring system for a tool-free recessed mounting in ceilings with thickness ranging from 1 to 25 mm. Luminaire comes complete with LED-module and DALI dimmable electronic driver. Bridging connection is possible. Dust-protection screen in transparent polycarbonate as an optional extra, installed by simple twist-and-lock mechanism. Complies with standard EN60598-1 and other specific standards.

CRI &gt; 90

UGR &lt; 19

**Light emission**

Downlighting



## TECHNICAL DATA SHEET

**Features**

Product name:	Luceri Led Java - 27W 4000K Dim. DALI - White
Article Code:	M238120
Colour:	White
Material:	Polycarbonate
Series:	Architectural
Environment:	Indoor
Area contract:	Hospitality Hotel, Hospitality Restaurant, Office

**OPTICS**

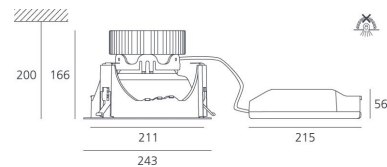

Emission:	Downlighting
-----------	--------------

**DIMENSIONS**

Height:	(cm) 16.6
Cutout width:	(cm) 21.1
Cutout diameter:	(cm) 23
Recessed depth:	(cm) 20
Cutout shape:	Rounded
Weight:	1.5
Glow Wire Test:	750 °

**LAMPS INCLUDED**

Category:	LED
Watt:	27
Luminous Flux (lm):	2000
Number:	1 x 1
Typology:	1
Color Rendering:	>90
Color temperature (K):	4000
Class:	A

**Dimensions****LAMP****ELECTRICAL**

Starter:	Electronic dimmable DALI Included
Voltage:	230/240V



LUCERI LED transparent  
polycarbonate screen  
M239200