

KAP 80 SQUARE FIXED OPTIC FLOOD

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array DC 500 mA 9,2W 810 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Diffusing lens included. Fast&Perfect pre-installation frame to be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	55°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class III






PHYSICAL



Recessed depth (mm)	93
Construction material	Die-cast aluminum
Weight (kg)	0,24




Kap 80 Square Fixed Optic Flood
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

	03.4536.GL - 684lm	Gold
	03.4536.B1 - 703lm	White
	03.4536.BU - 623lm	Blue
	03.4536.74 - 623lm	Black
	03.4536.CU - 666lm	Copper

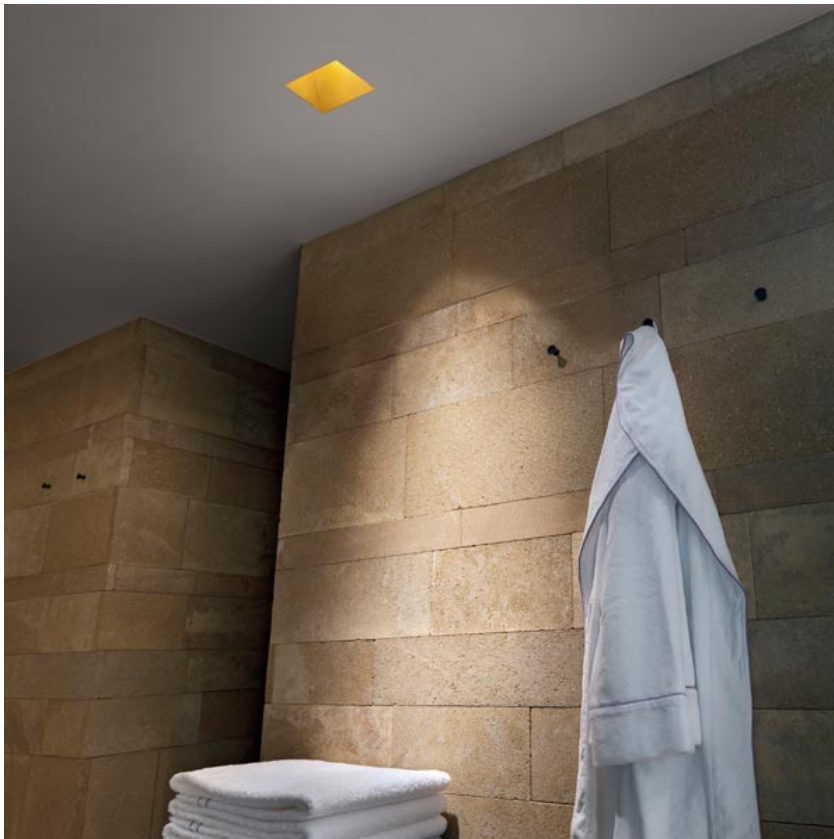

CERTIFICATIONS

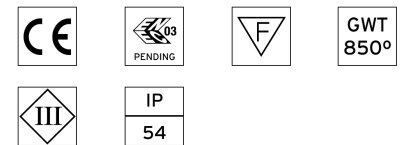

Kap 80 Square Fixed Optic Flood . Accessories

Power Supply



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8847

Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



Kap 80 Square Fixed Optic Flood designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4536.GL - 684lm	Gold
03.4536.B1 - 703lm	White
03.4536.BU - 623lm	Blue
03.4536.74 - 623lm	Black
03.4536.CU - 666lm	Copper




60.8880

Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm² secondary conductor (m): 50

Maximum length of 2.5 mm² secondary conductor (m): 50



CERTIFICATIONS



FLOS

Kap 80 Square Fixed Optic Flood . Accessories

Mounting



08.9103.00

Installation frame No Trim



08.9101.00

Fast&Perfect tool ø153



Kap 80 Square Fixed Optic Flood
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

- 03.4536.GL - 684lm Gold
- 03.4536.B1 - 703lm White
- 03.4536.BU - 623lm Blue
- 03.4536.74 - 623lm Black
- 03.4536.CU - 666lm Copper

Kap 80 Square Fixed Optic Flood . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array

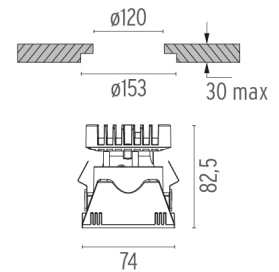

CERTIFICATIONS

