

## PRODUCT DATA SHEET

### Luceri Led Java - 27W 4000K Dim. DALI - Grey

**DESIGN BY :**

Artemide

**MATERIALS :**

Polycarbonate

**DESCRIPTION :**

Recessed fixed round luminaires with high-efficiency LED-module with frame. Recessing ring in polycarbonate. Reflector made from technopolymers with smooth specular metallised coating with an anti-scratch protective layer. The optics system consists of a lighting chamber with integral passive thermal management system, and featured with CREE TRUE WHITE® technology, an intelligent system that guarantees a constant colour temperature and permanent colour rendering index throughout entire service life. High luminous flux: 2000 lm (27W) and 2900 lm (37W) available with warm white (3000K) and neutral white (4000K) tones. Symmetric wide-beam light distribution. CRI > 90. Reflector with glare-control: UGR < 19 conforming to EN12464-1 standard. Service life: 50000 hours at 70% luminous flux. Spring system for a tool-free recessed mounting in ceilings with thickness ranging from 1 to 25 mm. Luminaire comes complete with LED-module and DALI dimmable electronic driver. Bridging connection is possible. Dust-protection screen in transparent polycarbonate as an optional extra, installed by simple twist-and-lock mechanism. Complies with standard EN60598-1 and other specific standards.

CRI &gt; 90

UGR &lt; 19

**Light emission**

Downlighting



## TECHNICAL DATA SHEET

**Features**

|                |  |
|----------------|--|
| Product name:  | Luceri Led Java - 27W 4000K Dim.<br>DALI - Grey      |
| Article Code:  | M238160  |
| Colour:        | Grey   |
| Material:      | Polycarbonate  |
| Series:        | Architectural  |
| Environment:   | Indoor   |
| Area contract: | Hospitality Hotel, Hospitality<br>Restaurant, Office |

**OPTICS**

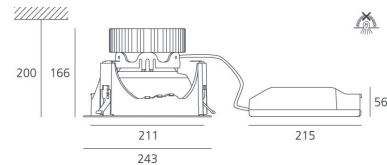
|           |              |
|-----------|--------------|
| Emission: | Downlighting |
|-----------|--------------|

**DIMENSIONS**

|                  |           |
|------------------|-----------|
| Height:          | (cm) 16.6 |
| Cutout width:    | (cm) 21.1 |
| Cutout diameter: | (cm) 23   |
| Recessed depth:  | (cm) 20   |
| Cutout shape:    | Rounded   |
| Weight:          | 1.5       |
| Glow Wire Test:  | 750 °     |

**LAMPS INCLUDED**

|                        |       |
|------------------------|-------|
| Category:              | LED   |
| Watt:                  | 27    |
| Luminous Flux (lm):    | 2000  |
| Number:                | 1 x 1 |
| Typology:              | 1     |
| Color Rendering:       | >90   |
| Color temperature (K): | 4000  |
| Class:                 | A     |

**Dimensions****LAMP****ELECTRICAL**

|          |                                   |
|----------|-----------------------------------|
| Starter: | Electronic dimmable DALI Included |
| Voltage: | 230/240V                          |



LUCERI LED transparent  
polycarbonate screen  
M239200