

PURE I DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED DC 700 mA 15,7W 1400 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Protection glass
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	15° Spot

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class III

PHYSICAL


Cutout diameter (mm)	135
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	0,75




Pure I Downlight
designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1645.30A - 1138lm White
- 09.1645.02A - 1138lm Grey
- 09.1645.14A - 1138lm Black

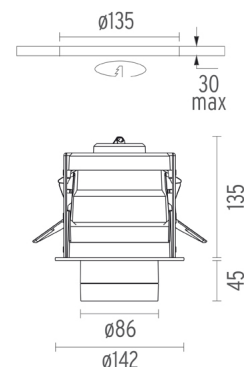

CERTIFICATIONS

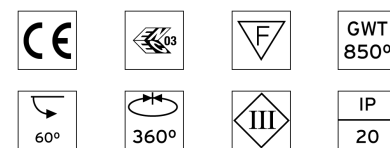

Pure I Downlight . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Downlight
designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.


- 09.1645.30A - 1138lm White
- 09.1645.02A - 1138lm Grey
- 09.1645.14A - 1138lm Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter

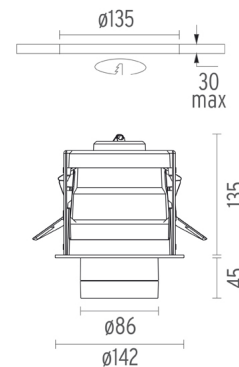

08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter




08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS

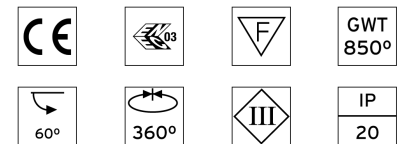


Pure I Downlight . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Downlight designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1645.30A - 1138lm White
- 09.1645.02A - 1138lm Grey
- 09.1645.14A - 1138lm Black



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02

● 08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

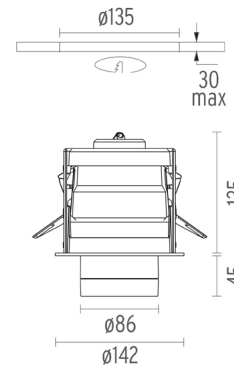

CERTIFICATIONS



Pure I Downlight . Accessories

Power Supply



60.8691

Constant Current Power Supply for LED. 700 mA / 20W

Non dimmable continuous current power supply 220/240V - 50/60Hz.

Maximum length of 1.5 mm² secondary conductor (m): 20

Maximum length of 2.5 mm² secondary conductor (m): 50



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10


Maximum length of 2.5 mm² secondary conductor (m): 15




Pure I Downlight
designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1645.30A - 1138lm White
- 09.1645.02A - 1138lm Grey
- 09.1645.14A - 1138lm Black


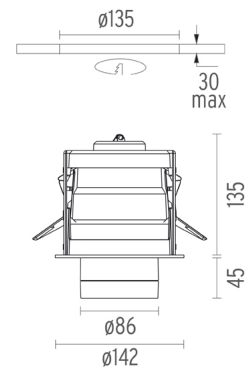


CERTIFICATIONS

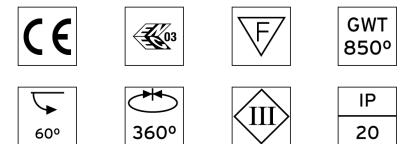

Pure I Downlight . Accessories

Mounting



08.8152.00

Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

HOW TO ORDER

● 08.8149.30

● 08.8149.02

● 08.8149.14

Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

Pure I Downlight designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

● 09.1645.30A - 1138lm White

● 09.1645.02A - 1138lm Grey

● 09.1645.14A - 1138lm Black

Pure I Downlight . Lamps



Power LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Power LED

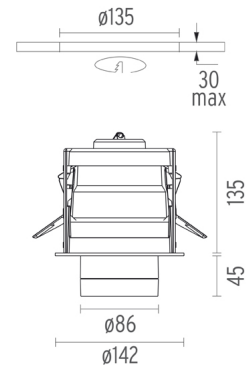

CERTIFICATIONS

