

## PURE I DOWNLIGHT

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED DC 700 mA 15,7W 1400 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	To be completed with installation frame. Available as accessory element. Must be ordered separately.

## OPTICAL

<b>Light controller description</b>	Protection glass
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	24° Medium

## ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

## PHYSICAL


<b>Cutout diameter (mm)</b>	135
<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,75





**Pure I Downlight**  
designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1646.30A - 957lm White
- 09.1646.02A - 957lm Grey
- 09.1646.14A - 957lm Black

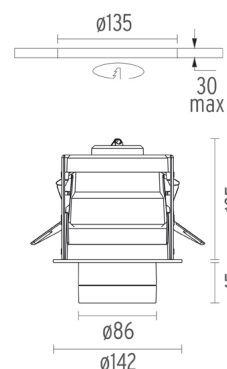

## CERTIFICATIONS

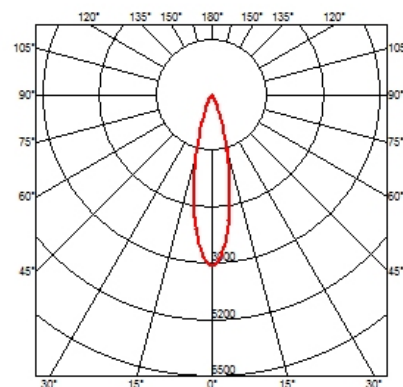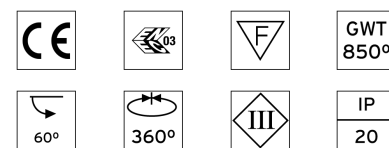

## Pure I Downlight . Accessories

### Optical



08.8166.14

**Holding ring**



08.8163.68

**Elliptical lens**

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

**Honeycomb**


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



**Pure I Downlight**  
designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.


- 09.1646.30A - 957lm White
- 09.1646.02A - 957lm Grey
- 09.1646.14A - 957lm Black



08.8160.64.OD

**Blue filter**


Blue filter



08.8160.65.OD

**Sky blue filter**



Sky blue filter



08.8160.66.OD

**Amber filter**

Amber filter

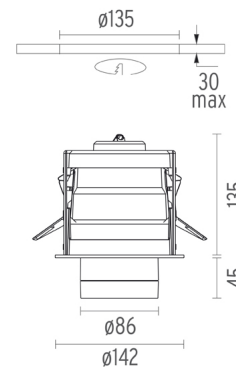

08.8160.67.OD

**Red filter**

Red filter



08.8160.98.OD

**U.V. filter**

U.V. filter





08.8160.68

**I.R. filter**

I.R. filter

### CERTIFICATIONS

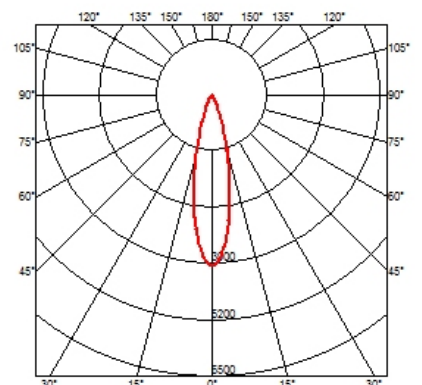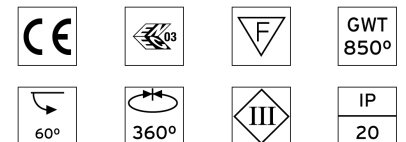


## Pure I Downlight . Accessories



08.8160.69

### Hot Light


Hot Light



08.8160.CL

### Cold light filter

Cold light filter



08.8160.DL

### Daylight filter

Daylight filter



### Pure I Downlight

designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1646.30A - 957lm White
- 09.1646.02A - 957lm Grey
- 09.1646.14A - 957lm Black



08.8160.ND

### Neodimium



○ 08.8175.68

### Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02



● 08.8232.14

### Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

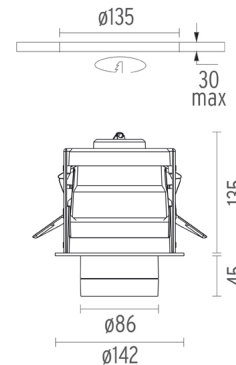

### CERTIFICATIONS

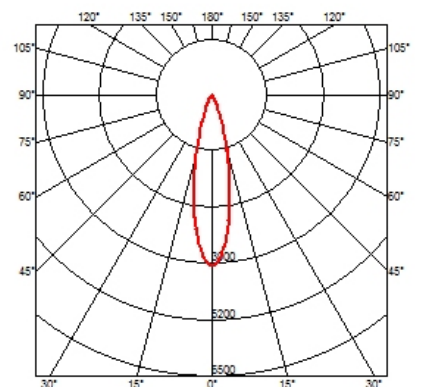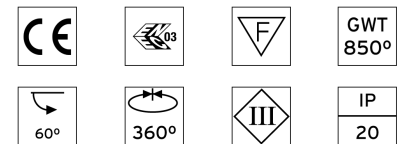

## Pure I Downlight . Accessories

### Power Supply



60.8691

#### Constant Current Power Supply for LED. 700 mA / 20W

Non dimmable continuous current power supply 220/240V - 50/60Hz.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 20

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15





### Pure I Downlight designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1646.30A - 957lm White
- 09.1646.02A - 957lm Grey
- 09.1646.14A - 957lm Black


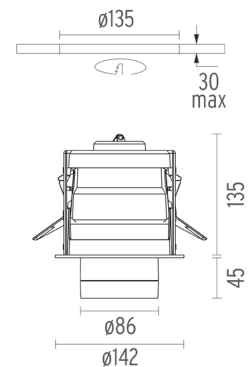


### CERTIFICATIONS

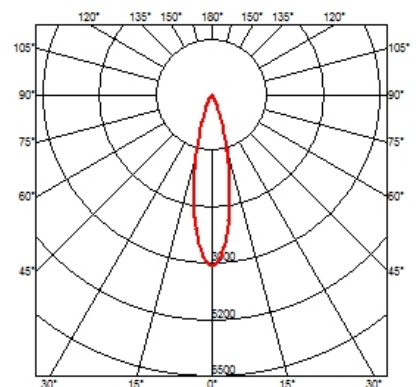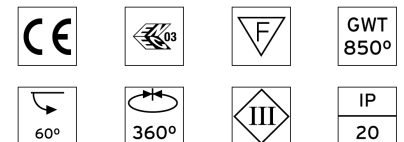

## Pure I Downlight . Accessories

### Mounting



08.8152.00

#### Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

#### HOW TO ORDER

- 08.8149.30
- 08.8149.02
- 08.8149.14

#### Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

#### Pure I Downlight designed by Knud Holscher

Embedded luminaire for LED light source. Power supply not included.

- 09.1646.30A - 957lm White
- 09.1646.02A - 957lm Grey
- 09.1646.14A - 957lm Black

### Pure I Downlight . Lamps



**Power LED**

**Lamp category:**


LED

**Socket:**

Special base

**Lamp type:**

Power LED

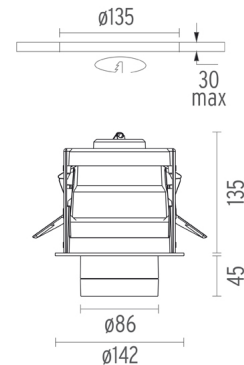

#### CERTIFICATIONS

