





CON ANELLO



CON GRIGLIA 45°



8mm 95mm



MINIBRIQUE TONDA E QUADRA INCASSO

TONDA

Art. S.4533 - S.4533W - S.4533BL

Art. S.4560 - S.4560W



Con 1 led 1W 230V c.a.
(cassaforma S.4612 non inclusa)

QUADRATA


Art. S.4543 - S.4543W - S.4543BL

Art. S.4561 - S.4561W




Con 1 led 1W 230V c.a.
(cassaforma S.4613 non inclusa)

CASSAFORMA S.4612

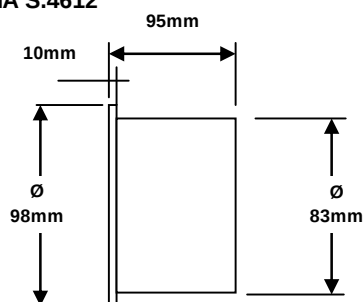

CASSAFORMA S.4613

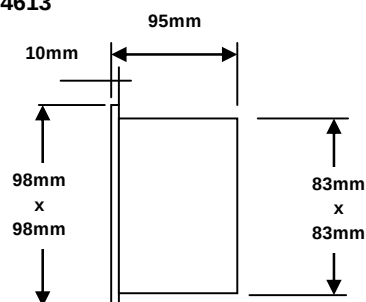

CARATTERISTICHE TECNICHE

CLASSE I - IP 54

ISTRUZIONI DI MONTAGGIO

Aprire l'apparecchio, rimuovendo le viti (A), svitare la vite (B) e rimuovere la piastra (C) dalla sua sede.

Inserire il cavo di tipo <HAR> D. 6 ÷ 10 mm nel gommino passafilo ed effettuare il cablaggio elettrico

Rimontare la piastra (C) con la vite (B)

Fissare l'apparecchio alla cassaforma con le viti in dotazione

Richiudere l'apparecchio con le viti (A)

NOTE: Secondo la CEI EN 60825-1 (IV°ed.- 2003) APPARECCHIO CON RADIAZIONE LED DI CLASSE 1.

In assenza del vetro non guardare direttamente con strumenti ottici (lenti di ingrandimento ,ecc..);

evitare di fissare il fascio direttamente ed in modo prolungato a distanze inferiori di 10cm.

Per l'installazione ad incasso utilizzare le apposite cassaforme

Non superare la potenza indicata nei dati di targa

Togliere tensione prima di effettuare manutenzioni

Alimentare gli apparecchi con tensione 230V c.a.



L' installazione deve essere eseguita da personale qualificato secondo le norme di settore.

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio e per la sicurezza delle persone,pertanto esse vanno conservate.



MINIBRIQUE LED RECESSED



WITH TRIM



WITH GRILLE 45°

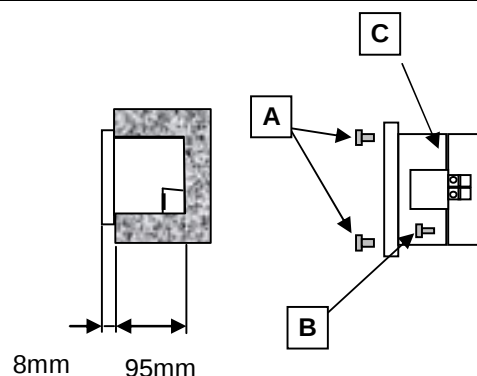

MINIBRIQUE ROUND AND SQUARED RECESSED

ROUND

Art. S.4533 - S.4533W - S.4533BL

Art. S.4560 - S.4560W



With 1 led 1W 230V a.c.
(recess box S.4612 not supplied)

SQUARE


Art. S.4543 - S.4543W - S.4543BL

Art. S.4561 - S.4561W




With 1 led 1W 230V a.c.
(recess box S.4613 not supplied)

RECESS BOX S.4612

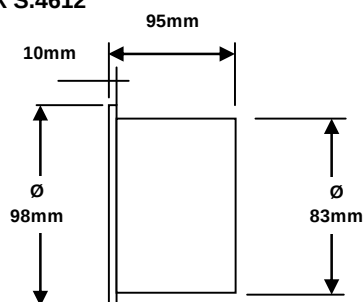

RECESS BOX S.4613

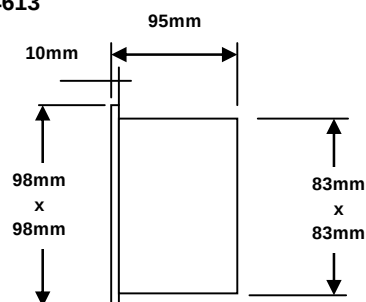

TECHNICAL CHARACTERISTICS:

CLASS I - PROTECTION LEVEL : IP 54

ASSEMBLING INSTRUCTIONS:

Open the fitting unscrewing the (A) screw, remove the screw (B) and remove the plate (C) from its position
Insert the wire type <HAR> D. 6 ÷ 10 mm into the grommet and connect them to the terminal block
Re-install the plate (C) in its position and screw down the (B) screw
Fix the fitting to the recess box with the supplied screw
Close the fitting screwing down the (A) screw

NOTES: According to CEI EN 60825-1 (4° edition 2003) FITTING WITH LED RADIATION CLASS 1.

When there isn't any glass, don't watch directly by optical tools such as magnifying lens and so on.. Avoid to continue looking at the beam for long time at a distance less than 10cm.

Use the appropriate recess box for recess

Do not exceed the maximum allowed wattage

Disconnect the fitting before the maintenance

Supply voltage must be 230V a.c.

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

The respect of these instructions is very important for the fitting life and for the people safety. Therefore, they must be retained.

SIMES
luce per l'architettura
ISTRMINIBRTQLED REV.7 03/14