

LUNA ROUND

09-Feb.-2017

1.0 LED HV

LED 7W | 220-240VAC | PCB 3-step | incl. PS | phase-cut dim

CE IP44 0.3m

3000K | >90CRI | 350lm

white texture
matte chrome
black texture

114388W5
114388M5
114388B5

OPTIONAL

for optional dimmers see our catalogue

1.0 LED

LED 7/10W | 350-500mA | 18Vf | COB 3-step | excl. power supply

CE IP44 0.3m

white texture
matte chrome
black texture

114381W_
114381M_
114381B_

LIGHT COLOUR

2700K | >90CRI | 360-510lm

3

3000K | >90CRI | 400-540lm

5

1800K-2850K | >95CRI | 270-370lm

9

ALWAYS USE

for power supplies see our catalogue

1.0 PAR16

PAR16 max. 10W | GU10 | 100-240VAC | 50-60Hz

CE IP44 0.9m

white texture
matte chrome
black texture

114120W0
114120M0
114120B0

OPTIONAL

for optional lamps see our catalogue

1.0 MR16

QR-CBC51 max. 10W | GU5.3 | 12V | excl. PS

CE IP44 0.9m

white texture
matte chrome
black texture

114110W0
114110M0
114110B0


ALWAYS USE

for power supplies see our catalogue


OPTIONAL

plaster kit
recessed housing

90017101
90012026

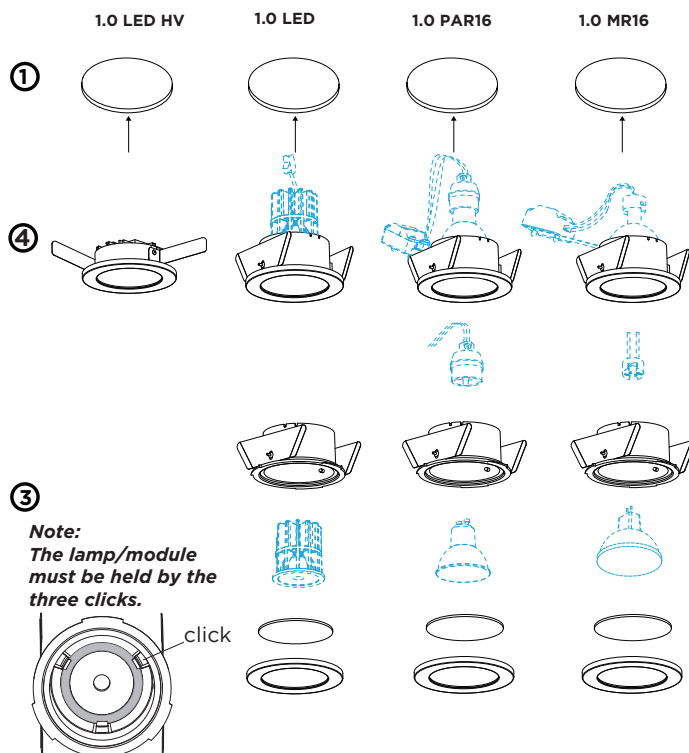


Note:
The lamp/module
must be held by the
three clicks.

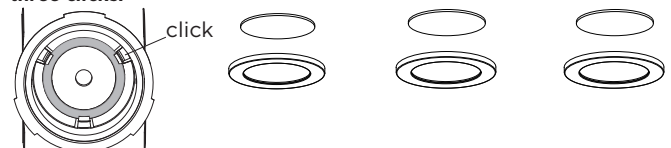

General mounting notice for ceiling / wall with optional plaster kit or recessed


PLASTER KIT

Use into brick walls
or plastered stalton



RECESSED HOUSING

Always use in combination
with plaster kit
Use in concrete structures



DIMENSIONS

1.0 LED HV				
1.0 LED				
1.0 PAR16				
1.0 MR16				

MOUNTING INSTRUCTION

① Make a hole in the ceiling according to the prescribed dimensions.

② POWER CONNECTION

Connect



③ Put the illuminant in the assembled cover.

Note: The lamp/module must be clicked into place.

④ Insert the fixture in the hole

OPTIONAL:

insert with Plaster Kit

or

insert with Plaster Kit and Recessed Housing

 **Caution, risk of electric shock** The light source of the integrated LED is not replaceable; When the light source reaches its end of life the whole luminaire shall be replaced.

PB19-010-372-00