

Job Name:

Contact:

Ordering Code:

Fixture Type:



red



white



cinnamon



blue

Zara Sconce

Description

The Zara wall sconce may be mounted as an up-light or a down-light. Bruck's glass allows for easy screw-on / screw-off for a simple installation. Metal canopy and stem is available in bronze, polished chrome, and matte chrome plating. Dimmable with ELV (Reverse Phase) at 120V only to 10%.


Mounting

Round canopy over a 3-1/2" - 4" recessed round j-box.

Ordering Codes

Follow the steps to specify your fixture, example: 104 - 300 - mc

Part Number	Shade Color	Finish
104 400 lm LED	300 white	bz bronze
100 low voltage	301 cinnamon	ch chrome
	302 blue	mc matte chrome
	303 red	

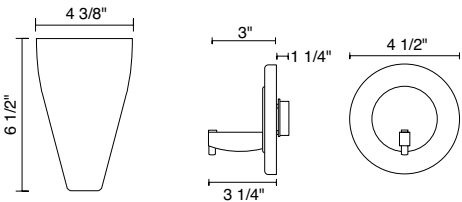

Technical Specs

Light Source	104 - 400 lm LED Canopy	100 - Low Voltage Bi-pin Canopy
LED CCT SDCM CRI Ra Life	<ul style="list-style-type: none">• Cree XTE• 2800K• 3 MacAdam Ellipse• 90 min• Based on IESNA-LM80-2008: 90% of initial lumens after 65,500 hrs	<ul style="list-style-type: none">• lamp dependent
Socket Listing	<ul style="list-style-type: none">• Integrated LED module• ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only)• cETL Listed to CSA C22.2 #250.0 and #9.0	<ul style="list-style-type: none">• GY6.35 socket• ETLus Listed to UL1598, UL1574 and UL2108 (Suitable for dry locations only)• cETL Listed to CSA C22.2 #250.0 and #9.0
Canopy	<ul style="list-style-type: none">• 100-277VAC, 50/60Hz input• 8W, 8VA• Mount to 3 1/2" - 4" round J-Box• Short circuit protection• Thermal protection	<ul style="list-style-type: none">• 120VAC 50/60Hz input• 11.7V AC output 49W, 50VA (max 50W lamp)• Mount to 3 1/2" - 4" round J-Box• Short circuit protection• Overload protection• Thermal protection
Warranty	<ul style="list-style-type: none">• 3 year limited fixture warranty	<ul style="list-style-type: none">• 1 year limited fixture warranty



Made in the USA - meets the requirements of the
Buy American provision within the ARRA