

PRODUCT DATA SHEET

Dado 10° 4000K



DESIGN BY :

Nord Light
2009

MATERIALS :

Aluminium

DESCRIPTION :

Light fixture with high-performance LED light sources. Wall installation. Square version. Adjustable spot lamp on the axis perpendicular to the wall (90°) and on the axis parallel to the wall by means of spot head rotation (355°). Composed by adjustable structure, spot unit, diffuser in transparent polycarbonate. Spot unit in computer numerical control machined billet anticorrosion aluminium. Painted projector with 2-stage outdoor treatment: primer, outdoor paint. Anodized finishing. Electrical connection to the mains by means of remote ballast. Silicone gaskets. 50 cm-long two-pole connection cable H05RN-F.

Aluminium wall fixing bracket.
Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

PMMA lenses. Fixed optic. (Beams 10°)

White monochromatic LEDs available.
Colour temperatures:
Neutral = 4000K

Light emission



IP65  

TECHNICAL DATA SHEET

Features

Product name:	Dado 10° 4000K
Article Code:	NL734810W0
Colour:	Aluminium
Material:	Aluminium
Series:	Nord Light, Outdoor
Area contract:	Hospitality Hotel, Outdoor Facade


DIMENSIONS

Length:	(cm) 20
Width:	(cm) 5
Height:	(cm) 5
Cutout shape:	

LAMPS INCLUDED

Category:	LED
Watt:	5W
Wattage (Single):	5W
Luminous Flux (lm):	206 lm
Number:	1 x 1
Typology:	1
Color temperature (K):	4000K
Class:	A
Current:	350mA

Dimensions

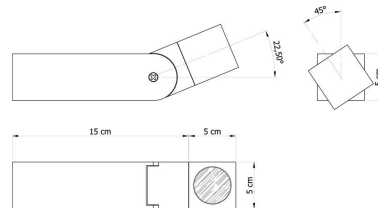


LAMP

IP65  


ELECTRICAL

Starter: Electronic ballast 350mA

DIAGRAMS

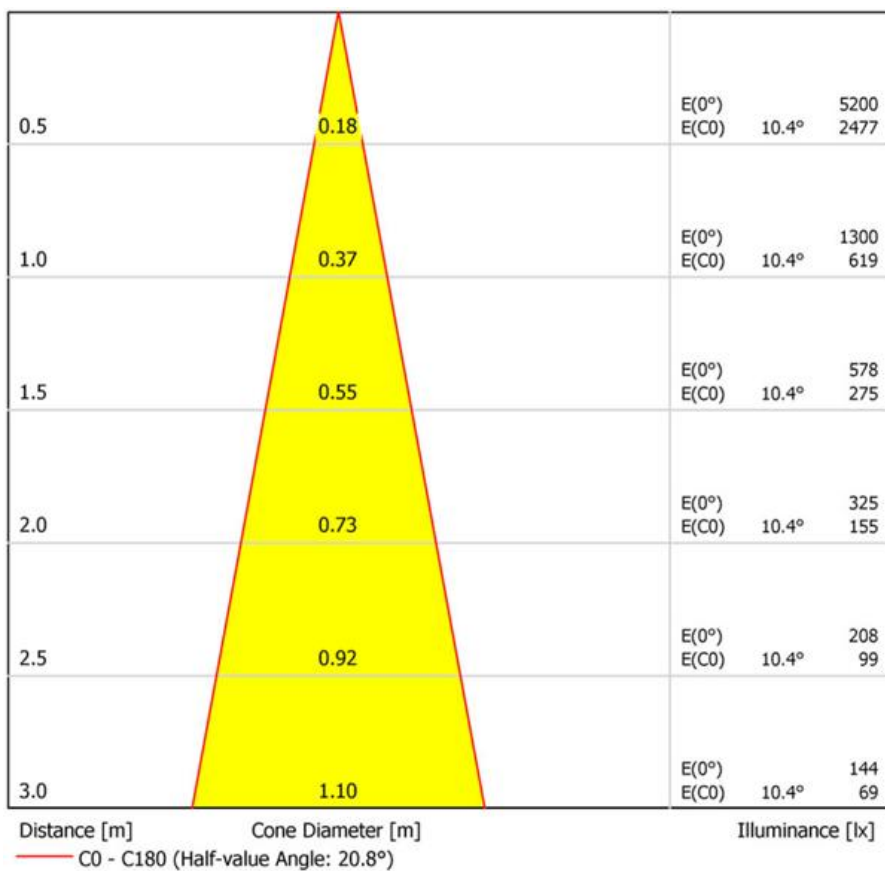

Dado_10°.Cone Diagram.jpg

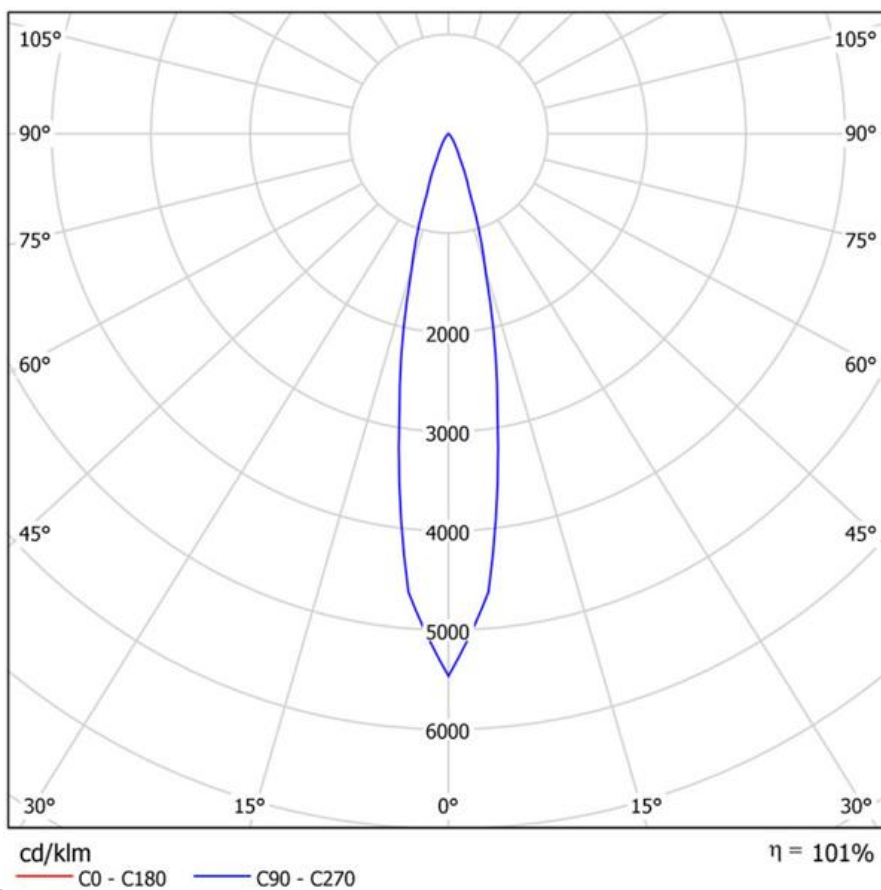

Dado_10°.LDC-Polar.jpg

