

## 100% Suspension - White



IP20


### DESIGN BY

Ross Lovegrove

### DESCRIPTION

Only 6mm of thickness of the aluminum body. Controlled direct and indirect diffuse emission. Touch dimmer on the module body (Only for 100% Suspension). Independent management of each module even within multiple configurations (Only for 100% Suspension). It is possible to connect up to 7 modules with a single power supply. Mechanical connecting elements (Magnetic) and electrical on the edges of each module. Connection joints 90 ° and 120 °.

### TECHNICAL DRAWINGS

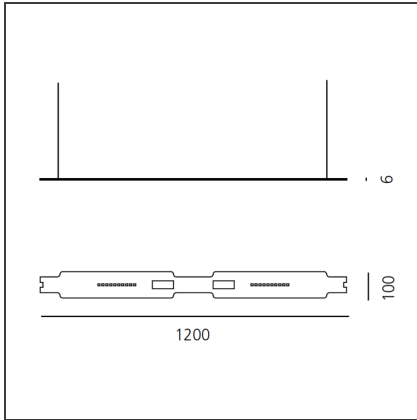

### FEATURES

|                      |             |                |           |
|----------------------|-------------|----------------|-----------|
| <b>Article Code:</b> | DRL1903A10B | <b>Series:</b> | Scenarios |
| <b>Colour:</b>       | White       |                |           |
| <b>Installation:</b> | Suspension  |                |           |
| <b>Environment:</b>  | Indoor      |                |           |

### DIMENSIONS

|                |        |
|----------------|--------|
| <b>Length:</b> | cm 120 |
| <b>Width:</b>  | cm 0,6 |
| <b>Height:</b> | cm 10  |
| <b>Weight:</b> | kg 1.6 |

### INCLUDED SOURCES


|                  |     |                               |       |
|------------------|-----|-------------------------------|-------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 3000K |
| <b>Number:</b>   | 1   |                               |       |
| <b>Watt:</b>     | 32W |                               |       |
| <b>Type:</b>     | 0   |                               |       |
| <b>Class:</b>    | A   |                               |       |

### LUMINAIRE

|              |     |                                      |              |
|--------------|-----|--------------------------------------|--------------|
| <b>Watt:</b> | 32W | <b>Delivered lumens output (lm):</b> | 2427lm       |
|              |     | <b>CCT:</b>                          | 4000K        |
|              |     | <b>Efficiency:</b>                   | 80%          |
|              |     | <b>Efficacy:</b>                     | 75,84lm/W    |
|              |     | <b>CRI:</b>                          | 80           |
|              |     | <b>Dimmer Typology:</b>              | Touch Dimmer |

**ACCESSORIES**

100% - 90°  
Connector White  
DRL1903AKTC110B



100% - 120°  
Connector White  
DRL1903AKTC210B



100% - Power  
supply kit 40W 1  
module White  
DRL1903AKA05



100% - Power  
supply kit 120W  
2/4 modules  
White  
DRL1903AKB05



100% - Power  
supply kit 320W  
5/7 modules  
White  
DRL1903AKC05



100% - Terminal  
head White  
DRL1903ATPC10