

A.24 - Ceiling Sharping Emission - Curved Elements - 24° - R=750mm - α=45° - 2700K - Brushed Copper



IP20 Dimmerable:


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

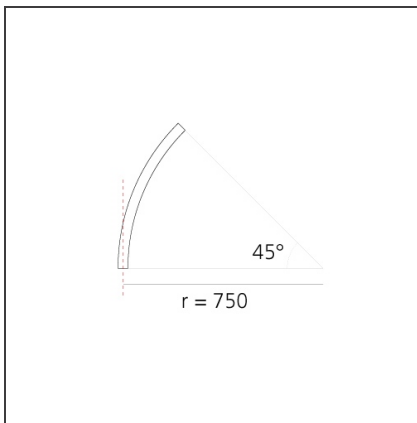

FEATURES

| | | | |
|----------------------|-------------------------------------|------------------|----------------------------|
| Article Code: | AQ62818 | Series: | Indoor, 2018 |
| Colour: | Brushed Copper | Emission: | Artemide Collection Direct |
| Installation: | Recessed, Wall, Suspension, Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|--------|
| Width: | cm 2.7 |
| Height: | cm 5.4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 12W | Service Life: | L70 (6K) 50000h |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|-------|
| Watt: | 12W | Delivered lumens output (lm): | 839lm |
| | | CCT: | 2700K |
| | | CRI: | 90 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17904




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17204



A.24 - Flexible Cover L=10m - Black AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI) AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable AQ17801




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17301



A.24 - Recessed Power Supply Kit AQ16800



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17304



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Copper AQ35018



A.24 - Wall/Ceiling Accessories - Transition Cap

Brushed copper


AQ39418




A.24 - Louver for Curved Elements - R=750mm - White (Order 1pc for 45°, 2 pcs for 90°)
AQ91101



A.24 - Louver for Curved Elements - R=750mm - Black (Order 1pc for 45°, 2 pcs for 90°)
AQ91104



A.24 - Flexible Cover L=10m - White
AQ92001




150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17701



150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17704



A.24 - Insulating Spacer (1x) - Brushed Copper
AQ35218



DALI to DALI-Selv Interface 103x67x21H
AQ18200