

A.24 - Ceiling Sharping Emission - Curved Elements - 24° - R=750mm - $\alpha=90^\circ$ - 4000K - White



IP20   Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

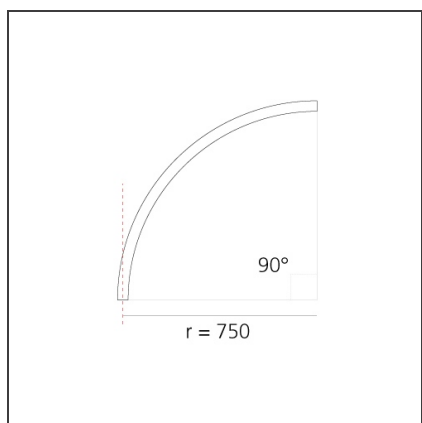

FEATURES

| | | | |
|----------------------|-------------------------------------|------------------|---------------------|
| Article Code: | AQ63501 | Series: | Indoor, 2018 |
| Colour: | White | | Artemide Collection |
| Installation: | Recessed, Wall, Suspension, Ceiling | Emission: | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|--------|
| Width: | cm 2,7 |
| Height: | cm 5,4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | CRI: | 90 |
| Watt: | 25W | | |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 25W | Delivered lumens output (lm): | 1678lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately.

ACCESSORIES


150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904



240W Bare power supply + plug - 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000



150W Bare power supply + plug - 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204




A.24 - Flexible Cover L=10m - Black
AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801



A.24 - Insulating Spacer (1x) - White
AQ35201



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable
AQ17801



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301
A.24 - Louver for Courved Elements - R=750mm - White (Order 1pc for 45°, 2 pcs for 90°)



A.24 - Recessed Power Supply Kit
AQ16800




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17304
A.24 - Flexible Cover L=10m - White
AQ92001



90°)
AQ91101



AQ91104




A.24 - Wall/Ceiling
Accessories - End
Cap (2x) - White
AQ35001



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



A.24 - Wall/Ceiling
Accessories -
Transition Cap -
White
AQ39401