

# A.24 - Ceiling Sharping Emission - Curved Elements - 62° - R=561mm - α=60° - 2700K - Brushed Silver



IP20   Dimmerable: 


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

## TECHNICAL DRAWINGS

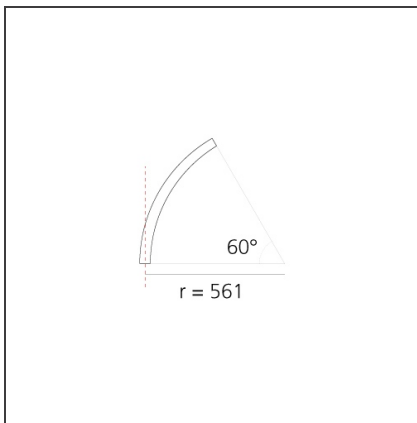

## FEATURES

|                      |  |                  |                     |
|----------------------|--|------------------|---------------------|
| <b>Article Code:</b> | AQ60915                                | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | Brushed Silver                         | <b>Emission:</b> | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling |                  | Direct              |
| <b>Environment:</b>  | Indoor                                 |                  |                     |

## DIMENSIONS

|                |        |
|----------------|--------|
| <b>Width:</b>  | cm 2.7 |
| <b>Height:</b> | cm 5.4 |

## INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 2700K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 12W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |

## LUMINAIRE

|              |     |                                      |       |
|--------------|-----|--------------------------------------|-------|
| <b>Watt:</b> | 12W | <b>Delivered lumens output (lm):</b> | 777lm |
|              |     | <b>CCT:</b>                          | 2700K |
|              |     | <b>CRI:</b>                          | 90    |

## Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White  
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black  
AQ17204



A.24 - Flexible Cover L=10m - Black  
AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI  
AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable  
AQ17801



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17301



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Silver  
AQ35015




A.24 - Recessed Power Supply Kit  
AQ16800



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17304  
A.24 - Louver for Curved Elements - R=561mm - Black  
AQ91004

A.24 - Louver for Curved Elements - R=561mm - White


A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed silver



AQ91001



AQ39415



A.24 - Flexible  
Cover L=10m -  
White  
AQ92001




150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17701



150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17704



A.24 - Insulating  
Spacer (1x) -  
Brushed Silver  
AQ35215



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200