

A.24 - Ceiling Sharping Emission - Curved Elements - 62° - R=750mm - α=90° - 2700K - Brushed Silver



IP20   Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

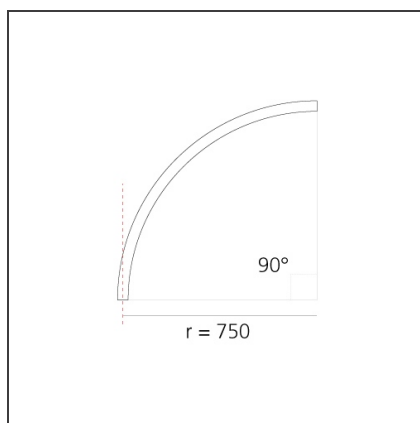

FEATURES

| | | | |
|---------------|-------------------------------------|-----------|---------------------|
| Article Code: | AQ63915 | Series: | Indoor, 2018 |
| Colour: | Brushed Silver | | Artemide Collection |
| Installation: | Recessed, Wall, Suspension, Ceiling | Emission: | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|---------|--------|
| Width: | cm 2,7 |
| Height: | cm 5,4 |

INCLUDED SOURCES

| | | | |
|-----------|-----|------------------------|-----------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 25W | Service Life: | L70 (6K) 50000h |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|-------|-----|-------------------------------|--------|
| Watt: | 25W | Delivered lumens output (lm): | 1555lm |
| | | CCT: | 2700K |
| | | CRI: | 90 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES


150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204



Cap for cable - Brushed Silver
AQ35315



A.24 - Flexible Cover L=10m - Black
AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable
AQ17801




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301




A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Silver
AQ35015




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17304



A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed silver



A.24 - Louver for Curved Elements - White (Order 1 pc for R=561-60°/90°)
R=750 45°, 2 pcs



A.24 - Louver for Curved Elements - Black (Order 1 pc for R=561-60°/90°)
R=750 45°, 2 pcs


AQ39415



A.24 - Flexible
Cover L=10m -
White
AQ92001



A.24 - Insulating
Spacer (1x) -
Brushed Silver
AQ35215



DALI to DALI-Selv
Interface
103x67x21H
AQ18200

for R=750 90°)
AQ91101



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



A.24 - Flexible
Cover L=2m -
White
AQ92101

for R=750 90°)
AQ91104



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



A.24 - Flexible
Cover L=2m -
Black
AQ92104