

A.24 - Ceiling Sharping Emission - Track - Direct Emission - 1176mm - 24° - 2700K - Brushed Silver



IP20 Dimmerable:


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

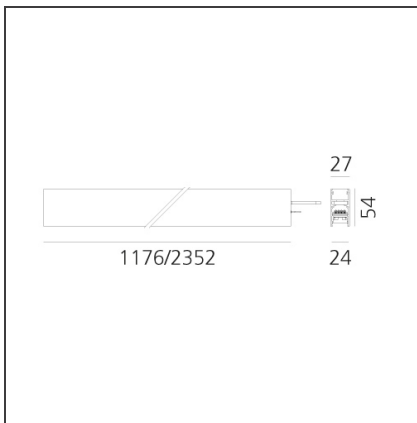

FEATURES

| | | | |
|----------------------|-------------------------------------|------------------|----------------------------|
| Article Code: | AQ32415 | Series: | Indoor, 2018 |
| Colour: | Brushed Silver | Emission: | Artemide Collection Direct |
| Installation: | Recessed, Wall, Suspension, Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|----------|
| Length: | cm 117.6 |
| Width: | cm 2.7 |
| Height: | cm 5.4 |
| Weight: | kg 1.4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 25W | Service Life: | L70 (6K) 50000h |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 25W | Delivered lumens output (lm): | 1528lm |
| | | CCT: | 2700K |
| | | CRI: | 90 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately.

ACCESSORIES



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17204



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI) AQ16000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable AQ17801



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17301



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Silver AQ35015




A.24 - Recessed Power Supply Kit AQ16800



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable -



A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed silver AQ39415




150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White

Black
AQ17304




150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704


AQ17701




A.24 - Insulating
Spacer (1x) -
Brushed Silver
AQ35215



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



A.24 - Sharping Kit
L=1176mm -
White
AQ26001



A.24 - Sharping Kit
L=1176mm - Black
AQ26004