

A.24 - Recessed Diffused Emission - 90° Angle (perpendicular planes) - Direct Emission - 2700K - White




IP20 Dimmerable:

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

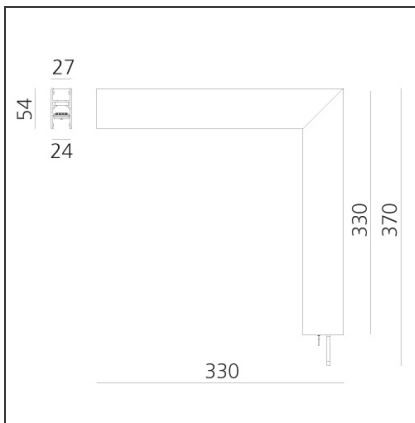

FEATURES

| | | | |
|----------------------|----------------------------------------|------------------|---------------------|
| Article Code: | AQ27301 | Series: | Indoor, 2018 |
| Colour: | White | | Artemide Collection |
| Installation: | Recessed, Wall, Suspension, Ceiling | Emission: | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|--------|
| Length: | cm 33 |
| Width: | cm 5,4 |
| Height: | cm 33 |
| Weight: | kg 0.9 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 16W | Service Life: | L70 (6K) 50000h |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 16W | Delivered lumens output (lm): | 1362lm |
| | | CCT: | 2700K |
| | | CRI: | 80 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17204



A.24 - Opal Diffusing Screen - 25m AQ16300



A.24 - Opal Diffusing Screen - 50m AQ16400




A.24 - Recessed Accessories - Transition Joint - White AQ29001



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI) AQ16000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI AQ16801



A.24 - Flexible Opal Diffusing Screen - 10m AQ90000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable AQ17801



A.24 - Flexible Opal Diffusing Screen - 25m AQ90100




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable -



A.24 - Flexible
Opal Diffusing
Screen - 50m
AQ90200




240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17304



A.24 - Recessed
Accessories -
Insulating Spacer
(1x)
AQ20601




A.24 - Recessed
Accessories - End
Cap (2x) - White
AQ25001




A.24 - Opal
Diffusing Screen -
10m
AQ16200



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200

White
AQ17301