

**A.24 - Recessed Diffused Emission - Track - Direct Emission - 2352mm - 3000K**




IP20 Dimmerable:

**DESIGN BY**

Carlotta de Bevilacqua

**TECHNICAL DRAWINGS**

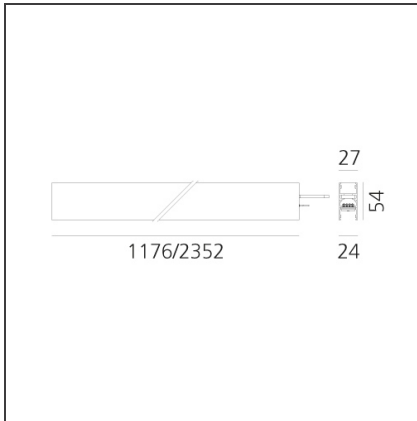

**FEATURES**

|                      |  |                  |                               |
|----------------------|--|------------------|-------------------------------|
| <b>Article Code:</b> | AQ20201                                | <b>Series:</b>   | Indoor, 2018                  |
| <b>Colour:</b>       | White                                  | <b>Emission:</b> | Artemide Collection<br>Direct |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling |                  |                               |
| <b>Environment:</b>  | Indoor                                 |                  |                               |

**DIMENSIONS**

|                        |          |
|------------------------|----------|
| <b>Length:</b>         | cm 235.2 |
| <b>Width:</b>          | cm 2.7   |
| <b>Weight:</b>         | kg 2.7   |
| <b>Recessed depth:</b> | cm 5.4   |

**INCLUDED SOURCES**

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 3000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 66W | <b>CRI:</b>                   | 80              |
| <b>Type:</b>     | 0   | <b>Service Life:</b>          | L70 (6K) 50000h |

**LUMINAIRE**

|              |     |                                      |        |
|--------------|-----|--------------------------------------|--------|
| <b>Watt:</b> | 66W | <b>Delivered lumens output (lm):</b> | 5769lm |
|              |     | <b>CCT:</b>                          | 3000K  |
|              |     | <b>CRI:</b>                          | 80     |


**Notes**

\*Uses 2 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately.

ACCESSORIES



A.24 - Recessed Accessories - Transition Joint - White  
AQ29001




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI  
AQ16801



A.24 - Recessed Accessories - Insulating Spacer (1x)  
AQ20601



A.24 - Recessed Accessories - End Cap (2x) - White  
AQ25001




A.24 - Opal Diffusing Screen - 10m  
AQ16200




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17901




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White  
AQ17201




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black  
AQ17204




A.24 - Opal Diffusing Screen - 25m




A.24 - Opal Diffusing Screen - 50m



A.24 - Opal Diffusing Screen - 2352mm




Diffusing Screen -  
3528mm  
AQ16700



Opal Diffusing  
Screen - 10m  
AQ90000




power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable  
AQ17801



A.24 - Flexible  
Opal Diffusing  
Screen - 25m  
AQ90100



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17301



A.24 - Flexible  
Opal Diffusing  
Screen - 50m  
AQ90200




240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17304



150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17701



150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17704



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200