

A.24 - Suspension Diffused Emission - Track - Direct + Indirect Emission - 1176mm - 2700K - White




IP20 Dimmerable:

DESIGN BY

Carlotta de Bevilacqua

TECHNICAL DRAWINGS

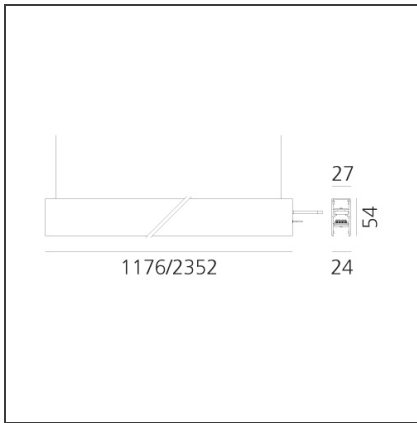

FEATURES

Article Code:	AQ46401	Series:	Indoor, 2018 Artemide Collection
Colour:	White	Emission:	Direct
Installation:	Recessed, Wall, Suspension, Ceiling		
Environment:	Indoor		

DIMENSIONS

Length:	cm 117.6
Width:	cm 2.7
Weight:	kg 1.7
Recessed depth:	cm 5.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	33W	Service Life:	L70 (6K) 50000h
Type:	0		
Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	16W	Service Life:	L70 (6K) 50000h
Type:	0		

LUMINAIRE

Watt:	49W	Delivered lumens output (lm):	4343lm
		CCT:	2700K
		Efficiency:	65%
		Efficacy:	88.64lm/W
		CRI:	80

Notes

*Uses 2 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately.


ACCESSORIES



A.24 - Suspension Accessories - Transition Cap - White
AQ49401



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ15404




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ16104




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



A.24 - Opal Diffusing Screen - 10m
AQ16200




A.24 - Suspension Accessories - Insulating Spacer (1x) - White
AQ45201




A.24 - Suspension Accessories - End Cap (2x) - White
AQ45101




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




A.24 - Opal Diffusing Screen - 25m
AQ16300




A.24 - Opal Diffusing Screen - 50m
AQ16400




A.24 - Opal Diffusing Screen - 1176mm
AQ16500
A.24 - Flexible




A.24 - Opal Diffusing Screen - 3528mm
AQ16700
A.24 - Flexible



Opal Diffusing
Screen - 10m
AQ90000



Opal Diffusing
Screen - 25m
AQ90100



Opal Diffusing
Screen - 50m
AQ90200



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17104



150W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17601




150W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101