

**A.24 - Suspension Diffused Emission - Track - Direct + Indirect Emission - 1176mm - 4000K - Brushed Silver**




IP20 Dimmerable:

**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

**TECHNICAL DRAWINGS**

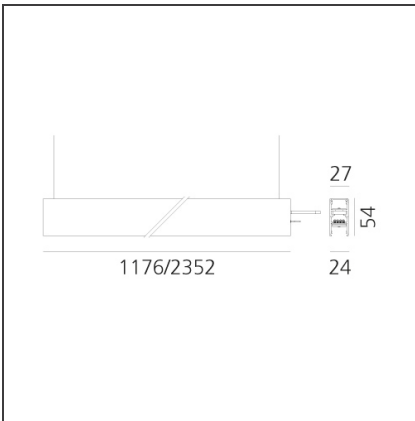

**FEATURES**

|                      |                                     |                  |                     |
|----------------------|-------------------------------------|------------------|---------------------|
| <b>Article Code:</b> | AQ46115                             | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | Brushed Silver                      |                  | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall, Suspension, Ceiling | <b>Emission:</b> | Direct              |
| <b>Environment:</b>  | Indoor                              |                  |                     |

**DIMENSIONS**

|                        |          |
|------------------------|----------|
| <b>Length:</b>         | cm 117.6 |
| <b>Width:</b>          | cm 2.7   |
| <b>Weight:</b>         | kg 1.7   |
| <b>Recessed depth:</b> | cm 5.4   |

**INCLUDED SOURCES**

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 4000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 16W | <b>CRI:</b>                   | 80              |
| <b>Type:</b>     | 0   | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 4000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 33W | <b>CRI:</b>                   | 80              |
| <b>Type:</b>     | 0   | <b>Service Life:</b>          | L70 (6K) 50000h |

**LUMINAIRE**

|              |           |                                      |                 |
|--------------|-----------|--------------------------------------|-----------------|
| <b>Watt:</b> | 33W + 16W | <b>Delivered lumens output (lm):</b> | 3013lm + 1593lm |
|              |           | <b>CCT:</b>                          | 4000K           |
|              |           | <b>CRI:</b>                          | 80              |

**Notes**

\*Uses 2 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ15404




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ16104




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000




A.24 - Opal Diffusing Screen - 10m  
AQ16200




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100




A.24 - Opal Diffusing Screen - 25m  
AQ16300




A.24 - Opal Diffusing Screen - 50m  
AQ16400




A.24 - Opal Diffusing Screen - 1176mm  
AQ16500




A.24 - Opal Diffusing Screen - 3528mm  
AQ16700



A.24 - Flexible Opal Diffusing Screen - 10m  
AQ90000




A.24 - Flexible Opal Diffusing Screen - 25m  
AQ90100



A.24 - Flexible Opal Diffusing Screen - 50m  
AQ90200



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black



A.24 - Suspension  
Accessories - End  
Cap (2x) - Brushed  
Silver  
AQ45115



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17601



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17604




150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17501



150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17504



A.24 - Suspension  
Accessories -  
Transition Cap -  
Brushed silver  
AQ49415



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17401



A.24 - Suspension  
Accessories -  
Insulating Spacer  
(1x) - Brushed  
Silver  
AQ45215



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17404



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17101