

**A.24 - Suspension Diffused Emission - Track - Direct + Indirect Emission - 2352mm - 4000K - White**




IP20 Dimmerable: + -

**DESIGN BY**

Carlotta de Bevilacqua

**TECHNICAL DRAWINGS**

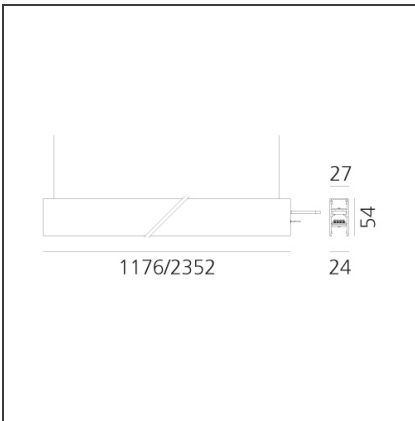

**FEATURES**

<b>Article Code:</b>	AQ46301	<b>Series:</b>	Indoor, 2018
<b>Colour:</b>	White		Artemide Collection
<b>Installation:</b>	Ceiling, Suspension, Wall, Recessed	<b>Emission:</b>	Direct
<b>Environment:</b>	Indoor		

**DIMENSIONS**

<b>Length:</b>	cm 235.2
<b>Width:</b>	cm 2.7
<b>Weight:</b>	kg 2.7
<b>Recessed depth:</b>	cm 5.4

**INCLUDED SOURCES**

<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	54W	<b>CRI:</b>	80
<b>Type:</b>	0	<b>Service Life:</b>	L70 (6K) 50000h
<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	66W	<b>CRI:</b>	80
<b>Type:</b>	0	<b>Service Life:</b>	L70 (6K) 50000h

**LUMINAIRE**

<b>Watt:</b>	66W + 32W	<b>Delivered lumens output (lm):</b>	6027lm + 3185lm
		<b>CCT:</b>	4000K
		<b>Efficiency:</b>	65%
		<b>Efficacy:</b>	94.01lm/W
		<b>CRI:</b>	80

**Notes**

\*Uses 3 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


**ACCESSORIES**



A.24 - Suspension Accessories - Insulating Spacer (1x) - White  
AQ45201




A.24 - Suspension Accessories - Transition Cap - White  
AQ49401



A.24 - Suspension Accessories - End Cap (2x) - White  
AQ45101




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ15404




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ16104




A.24 - Opal Diffusing Screen - 25m  
AQ16300




A.24 - Opal Diffusing Screen - 50m  
AQ16400



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)



A.24 - Opal Diffusing Screen - 2352mm  
AQ16600  
240W Ceiling



A.24 - Opal Diffusing Screen - 3528mm  
AQ16700  
150W Ceiling



power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17104



power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17601




150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17604




150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17501



150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17504



A.24 - Opal  
Diffusing Screen -  
10m  
AQ16200



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17401



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17404



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17101