

**A.24 - Suspension Diffused Emission - Track - Direct Emission - 1176mm - 3000K - Brushed Copper**




IP20 Dimmerable:

**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

**TECHNICAL DRAWINGS**

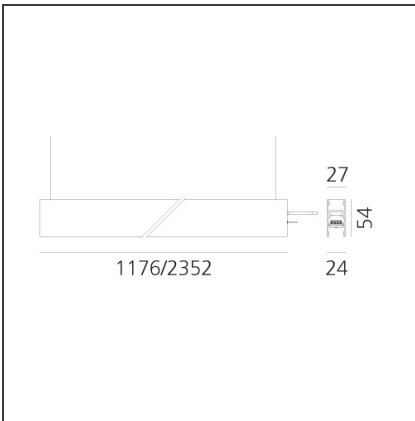

**FEATURES**

|                      |  |                  |                               |
|----------------------|--|------------------|-------------------------------|
| <b>Article Code:</b> | AQ41018                                | <b>Series:</b>   | Indoor, 2018                  |
| <b>Colour:</b>       | Brushed Copper                         | <b>Emission:</b> | Artemide Collection<br>Direct |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling |                  |                               |
| <b>Environment:</b>  | Indoor                                 |                  |                               |

**DIMENSIONS**

|                        |          |
|------------------------|----------|
| <b>Length:</b>         | cm 117.6 |
| <b>Width:</b>          | cm 2.7   |
| <b>Weight:</b>         | kg 1.7   |
| <b>Recessed depth:</b> | cm 5.4   |

**INCLUDED SOURCES**

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 3000K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 33W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |

**LUMINAIRE**

|              |     |                                      |        |
|--------------|-----|--------------------------------------|--------|
| <b>Watt:</b> | 33W | <b>Delivered lumens output (lm):</b> | 2884lm |
|              |     | <b>CCT:</b>                          | 3000K  |
|              |     | <b>CRI:</b>                          | 80     |

**Notes**

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately.


**ACCESSORIES**



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ15404



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ16104




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000



A.24 - Opal Diffusing Screen - 10m  
AQ16200




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100




A.24 - Opal Diffusing Screen - 25m  
AQ16300




A.24 - Opal Diffusing Screen - 1176mm  
AQ16500




A.24 - Opal Diffusing Screen - 3528mm  
AQ16700



A.24 - Flexible Opal Diffusing Screen - 10m  
AQ90000




A.24 - Flexible Opal Diffusing Screen - 25m  
AQ90100



A.24 - Flexible Opal Diffusing Screen - 50m  
AQ90200



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black



A.24 - Suspension  
Accessories - End  
Cap (2x) - Brushed  
Copper  
AQ45118



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17601



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17604




150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17501



150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17504



A.24 - Suspension  
Accessories -  
Transition Cap -  
Brushed copper  
AQ49418



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17401



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17404



A.24 - Suspension  
Accessories -  
Insulating Spacer  
(1x) - Brushed  
Copper  
AQ45218



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17101