

A.24 - Suspension Diffused Emission - Track - Direct Emission - 2352mm - 4000K - Brushed Copper




IP20 Dimmerable:

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

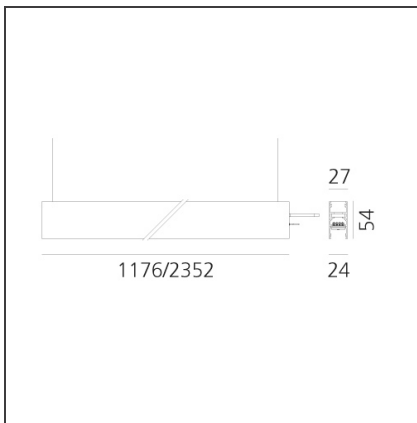

FEATURES

| | | | |
|----------------------|-------------------------------------|------------------|---------------------|
| Article Code: | AQ41318 | Series: | Indoor, 2018 |
| Colour: | Brushed Copper | Emission: | Artemide Collection |
| Installation: | Ceiling, Suspension, Wall, Recessed | | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|------------------------|----------|
| Length: | cm 235.2 |
| Width: | cm 2.7 |
| Weight: | kg 2.7 |
| Recessed depth: | cm 5.4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 66W | CRI: | 80 |
| Type: | 0 | Service Life: | L70 (6K) 50000h |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 66W | Delivered lumens output (lm): | 6027lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |


Notes

*Uses 2 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ15404




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ16104



A.24 - Opal Diffusing Screen - 25m
AQ16300




A.24 - Opal Diffusing Screen - 50m
AQ16400



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000




A.24 - Opal Diffusing Screen - 2352mm
AQ16600



A.24 - Opal Diffusing Screen - 3528mm
AQ16700



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17104



A.24 - Suspension Accessories - End Cap (2x) - Brushed Copper
AQ45118



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 -

Undimmable -
White
AQ17601




150W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501




150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504



A.24 - Opal
Diffusing Screen -
10m
AQ16200



A.24 - Suspension
Accessories -
Transition Cap -
Brushed copper
AQ49418



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



A.24 - Suspension
Accessories -
Insulating Spacer
(1x) - Brushed
Copper
AQ45218



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101