

## A.24 - Suspension Sharping Emission - Curved Elements - 62° - R=750mm - $\alpha=45^\circ$ - 3000K - Brushed Silver



IP20   Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

### TECHNICAL DRAWINGS

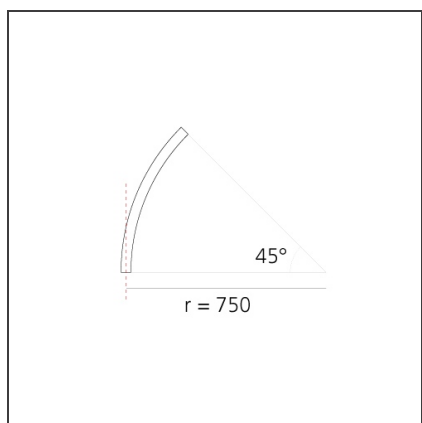

### FEATURES

|                      |                                     |                  |                     |
|----------------------|-------------------------------------|------------------|---------------------|
| <b>Article Code:</b> | AQ72415                             | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | Brushed Silver                      |                  | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall, Suspension, Ceiling | <b>Emission:</b> | Direct              |
| <b>Environment:</b>  | Indoor                              |                  |                     |

### DIMENSIONS

|                |        |
|----------------|--------|
| <b>Width:</b>  | cm 2,7 |
| <b>Height:</b> | cm 5,4 |

### INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 2700K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 12W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |

### LUMINAIRE

|              |     |                                      |       |
|--------------|-----|--------------------------------------|-------|
| <b>Watt:</b> | 12W | <b>Delivered lumens output (lm):</b> | 777lm |
|              |     | <b>CCT:</b>                          | 3000K |
|              |     | <b>CRI:</b>                          | 80    |

### Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**


Suspension  
Accessories -  
Recessed Power  
Supply Kit For  
Suspension  
Modules (230VAC-  
48VDC 240W DALI)  
- Black  
AQ15404



A.24 - Suspension  
Accessories -  
Ceiling Power  
Supply Kit For  
Suspension  
Modules (230VAC-  
48VDC 240W DALI)  
- White  
AQ16101



A.24 - Suspension  
Accessories -  
Ceiling Power  
Supply Kit For  
Suspension  
Modules (230VAC-  
48VDC 240W DALI)  
- Black  
AQ16104




A.24 - Flexible  
Cover L=10m -  
Black  
AQ92004



A.24 - Remote Box  
Power Supply Kit -  
313x243x57,5h -  
(230VAC-48VDC  
240W DALI)  
AQ16000



Suspension  
Accessories -  
Recessed Power  
Supply Kit For  
Suspension  
Modules (230VAC-  
48VDC 240W DALI)  
- White  
AQ15401



240W Bare power  
supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimnable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18000




150W Bare power  
supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimnable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18100



A.24 - Insulating  
Spacer (1x) -  
Brushed Silver  
AQ45315



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17104



A.24 - Suspension  
Accessories - End  
Cap (2x) - Brushed  
Silver  
AQ45115



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17601  
150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17604  
A.24 - Louver for  
Courved Elements  
- Black (Order 1pc  
for R=561 60°/90°  
R=750 45°, 2 pcs

A.24 - Louver for  
Courved Elements  
- White (Order 1pc  
for R=561 60°/90°  
R=750 45°, 2 pcs



for R=750 90°)  
AQ91101



DALI - White  
AQ17501



for R=750 90°)  
AQ91104



150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17504



A.24 - Flexible  
Cover L=10m -  
White  
AQ92001




A.24 - Suspension  
Accessories -  
Transition Cap -  
Brushed silver  
AQ49415



A.24 - Flexible  
Cover L=2m -  
White  
AQ92101



A.24 - Flexible  
Cover L=2m -  
Black  
AQ92104



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17401



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17404



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17101