


**A.24 - Wall/Ceiling Diffused Emission - Curved Elements - R=561mm -  $\alpha=90^\circ$  - 2700K - Brushed Bronze**

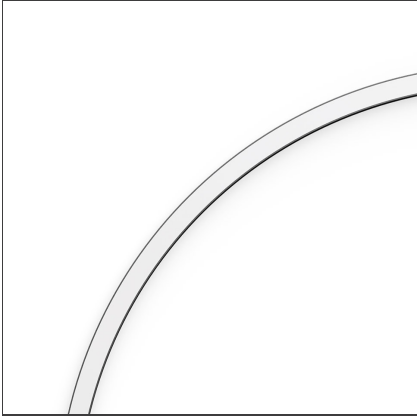


IP20 Dimmerable:

**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

**TECHNICAL DRAWINGS**

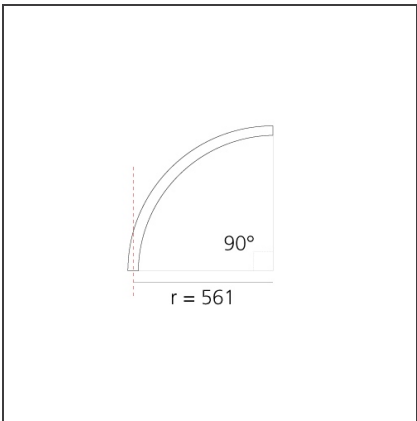

**FEATURES**

|                      |  |                  |                     |
|----------------------|--|------------------|---------------------|
| <b>Article Code:</b> | AQ61720                                | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | Brushed Bronze                         |                  | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling | <b>Emission:</b> | Direct              |
| <b>Environment:</b>  | Indoor                                 |                  |                     |

**DIMENSIONS**

|                |        |
|----------------|--------|
| <b>Width:</b>  | cm 2.7 |
| <b>Height:</b> | cm 5.4 |

**INCLUDED SOURCES**

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 2700K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 25W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |


**LUMINAIRE**

|              |     |                                      |        |
|--------------|-----|--------------------------------------|--------|
| <b>Watt:</b> | 25W | <b>Delivered lumens output (lm):</b> | 1781lm |
|              |     | <b>CCT:</b>                          | 2700K  |
|              |     | <b>CRI:</b>                          | 80     |

**Notes**

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Bronze  
AQ35020



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17901




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000



Flexible Opal Diffusing Screen  
AQ90300



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White  
AQ17201




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black  
AQ17204



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI  
AQ16801




A.24 - Flexible Opal Diffusing Screen - 10m  
AQ90000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable  
AQ17801



A.24 - Wall/Ceiling Accessories - Insulating Spacer (1x) - Brushed Bronze  
AQ35120




A.24 - Flexible Opal Diffusing Screen - 25m

AQ90100



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17301



A.24 - Flexible Opal Diffusing Screen - 50m AQ90200



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17304



A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed bronze AQ39420




150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17701



Cap for cable - Brushed Bronze AQ35320



150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17704



DALI to DALI-Selv Interface 103x67x21H AQ18200