


A.24 - Wall/Ceiling Diffused Emission - Track - Direct Emission - 1176mm - 4000K - Brushed Copper

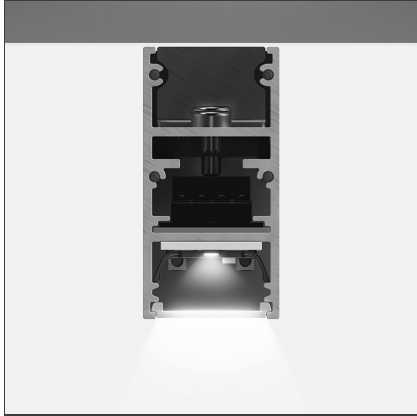


IP20 Dimmerable:

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

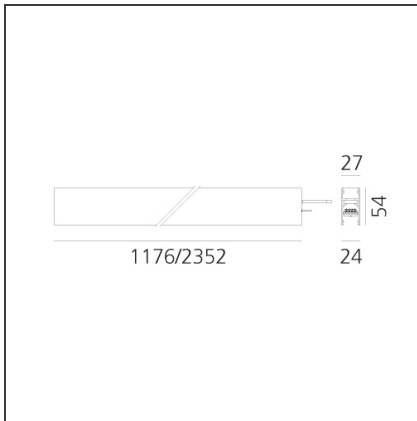

FEATURES

Article Code:	AQ31118	Series:	Indoor, 2018
Colour:	Brushed Copper	Emission:	Artemide Collection Direct
Installation:	Recessed, Wall, Suspension, Ceiling		
Environment:	Indoor		

DIMENSIONS

Length:	cm 117.6
Width:	cm 2.7
Height:	cm 5.4
Weight:	kg 1.7

INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	33W	CRI:	80
Type:	0	Service Life:	L70 (6K) 50000h

LUMINAIRE

Watt:	33W	Delivered lumens output (lm):	3013lm
		CCT:	4000K
		CRI:	80

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 bracket for fixing to ceiling is included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI) AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI AQ16801




A.24 - Opal Diffusing Screen - 10m AQ16200




150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17904




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17201




240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17204




A.24 - Opal Diffusing Screen - 25m AQ16300



A.24 - Opal Diffusing Screen - 50m AQ16400



A.24 - Opal Diffusing Screen - 1176mm AQ16500



A.24 - Opal Diffusing Screen - 3528mm AQ16700




A.24 - Wall/Ceiling Accessories - Insulating Spacer (1x) - Brushed Copper AQ35118



A.24 - Flexible Opal Diffusing Screen - 10m AQ90000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC




A.24 - Flexible Opal Diffusing Screen - 25m AQ90100

IP20 -
Undimmable
AQ17801



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17301



A.24 - Flexible
Opal Diffusing
Screen - 50m
AQ90200



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17304



A.24 - Wall/Ceiling
Accessories - End
Cap (2x) - Brushed
Copper
AQ35018




A.24 - Wall/Ceiling
Accessories -
Transition Cap -
Brushed copper
AQ39418



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200