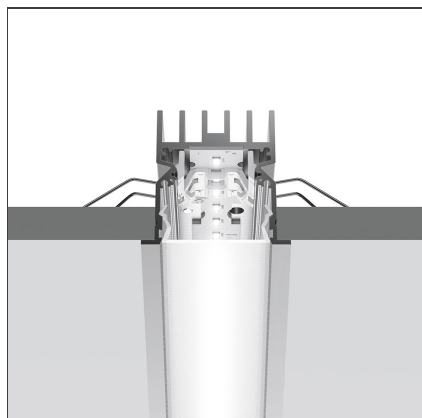


## A.39 Recessed - Structural Module Trim 1482mm 4000K Undimmable Silver


 IP20 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

### TECHNICAL DRAWINGS

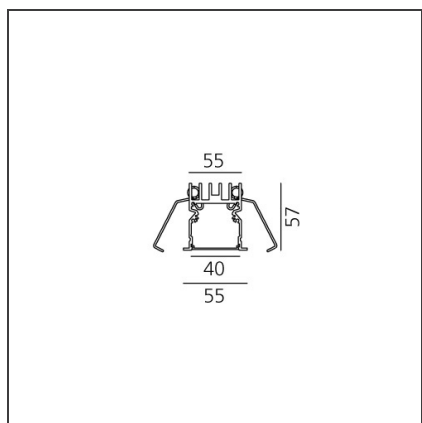

### FEATURES

Article Code:	AT05705	Series:	Indoor
Colour:	Silver	Emission:	Direct
Installation:	Recessed		
Environment:	Indoor		

### DIMENSIONS

Length:	cm 148
---------	--------

### INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1		
Watt:	41W		
Type:	0		
Class:	A		

### LUMINAIRE

Watt:	41W	Delivered lumens output (lm):	2624lm
		CCT:	4000K
		CRI:	80

**ACCESSORIES**


A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 15m -  
Silver  
AT09105



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=2368mm  
AT10200



A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 5m -  
Silver  
AT09005



A.39 Recessed -  
Frame Cap 2x  
AT09300



A.39 Recessed -  
Trim End Cap (Kit  
2x) - Up to 35m -  
Silver  
AT09205



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=25000mm  
AT10800



A.39 Recessed -  
Trimless Frame Kit  
- L=1488mm  
AT04000



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=1184mm  
AT10100



End Cap (x2)  
AT09301



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=10000mm  
AT10000



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=2960mm  
AT10300



A.39 Recessed -  
Trimless Frame Kit  
- L=4736mm  
AT04100



A.39 - Opal  
Diffuser in  
Polycarbonate -  
L=50000mm  
AT10900