


**A.39 Suspension - Direct + Indirect Emission - 2368mm - 20° - 3000K - Dimmable DALI - 4x4 Optics - Silver**

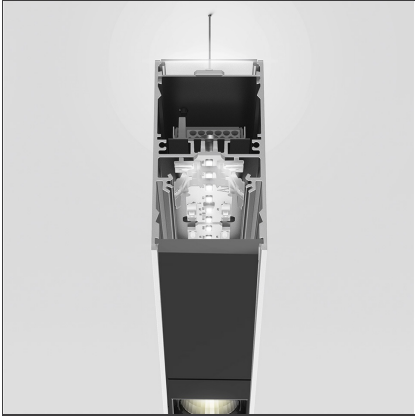


IP 20 Dimmerable:

**DESIGN BY**

Carlotta de Bevilacqua

**DESCRIPTION**

**TECHNICAL DRAWINGS**

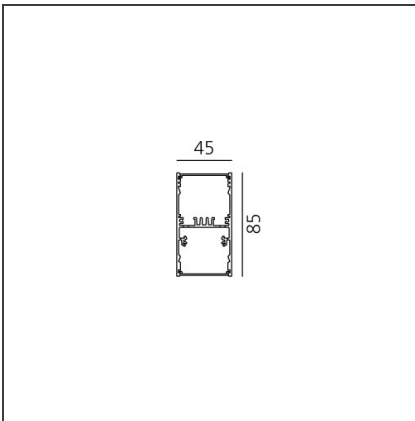

**FEATURES**

|                      |                     |                |        |
|----------------------|---------------------|----------------|--------|
| <b>Article Code:</b> | BH14205             | <b>Series:</b> | Indoor |
| <b>Colour:</b>       | Silver              |                |        |
| <b>Installation:</b> | Suspension, Ceiling |                |        |

**DIMENSIONS**

|                |        |
|----------------|--------|
| <b>Length:</b> | cm 237 |
| <b>Width:</b>  | cm 4.5 |
| <b>Height:</b> | cm 8.5 |

**INCLUDED SOURCES**

|                  |     |                               |                   |
|------------------|-----|-------------------------------|-------------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 3000K             |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM     |
| <b>Watt:</b>     | 50W | <b>Service Life:</b>          | L90 (20K) 118000h |
| <b>Type:</b>     | 0   |                               |                   |
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 3000K             |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM     |
| <b>Watt:</b>     | 54W | <b>Service Life:</b>          | L90 (20K) 118000h |
| <b>Type:</b>     | 0   |                               |                   |

**LUMINAIRE**

|              |      |                                      |           |
|--------------|------|--------------------------------------|-----------|
| <b>Watt:</b> | 104W | <b>Delivered lumens output (lm):</b> | 9209lm    |
|              |      | <b>CCT:</b>                          | 3000K     |
|              |      | <b>Efficiency:</b>                   | 82%       |
|              |      | <b>Efficacy:</b>                     | 88.55lm/W |
|              |      | <b>CRI:</b>                          | 90        |
|              |      | <b>Dimmable Typology:</b>            | Dali      |

**Notes**

Screen supplied separately. \*Driver uses 1 DALI address


**ACCESSORIES**



Louvre - 2368mm  
4x4 optics white  
AE42001



Louvre - 2368mm  
4x4 optics black  
AE42004



A.39 - Mechanical  
joint including 1  
suspension cable  
AT09500



Sharping wall  
grazer lens Kit  
(4pcs) - 26°x70°  
elliptical lenses kit.  
It has to be used  
on top of S 20°  
reflectors to get  
an elliptical beam  
(greter axis along  
the module  
length). It contains  
4 lenses.  
AF06000



Angle louvre - 90°  
corner screen (on  
same plane) -  
White  
BH44001



Angle louvre - 90°  
corner screen (on  
same plane) -  
Black  
BH44004



A.39 - Dimmable  
Feeding kit  
including 2  
suspension cables  
(5 poles) 2000m  
(H)  
AT10500



A.39 -  
Suspension/Ceiling  
- Corner (on same  
plane) - Silver  
BH35005



A.39 -  
Suspension/Ceiling  
- End Caps (2pcs) -  
Silver  
BH16405