






A.39 Suspension - Structural Module 1184mm - Direct + Indirect Emission - 4000K - DALI - Silver

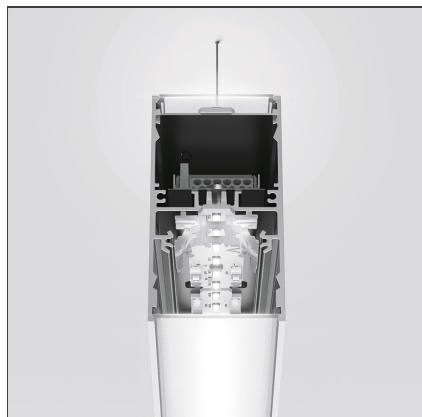

IP20    Dimmerable: +  -


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

TECHNICAL DRAWINGS

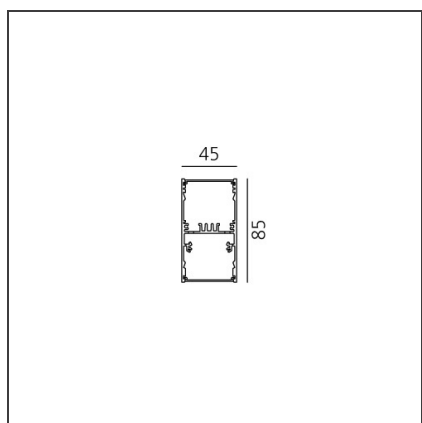

FEATURES

| | | | |
|---------------|---------|---------|--------|
| Article Code: | AT19205 | Series: | Indoor |
| Colour: | Silver | | |
| Installation: | Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|---------|--------|
| Length: | cm 118 |
| Width: | cm 4.5 |
| Height: | cm 8.5 |

INCLUDED SOURCES

| | | | |
|-----------|-----|------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | | |
| Watt: | 23W | | |
| Type: | 0 | | |
| Class: | A | | |
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | | |
| Watt: | 34W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|-------|-----------|-------------------------------|-----------------|
| Watt: | 34W + 23W | Delivered lumens output (lm): | 1977lm + 3089lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |
| | | Dimmable Typology: | Dali |

ACCESSORIES



A.39 - Mechanical joint including 1 suspension cable AT09500



A.39 - Opal Diffuser in Polycarbonate - L=10000mm AT10000



A.39 - Dimmable Feeding kit including 2 suspension cables (5 poles) 2000m (H) AT10500



A.39 - Opal Diffuser in Polycarbonate - L=1184mm AT10100



A.39 - Opal Diffuser in Polycarbonate - L=25000mm AT10800



A.39 - Opal Diffuser in Polycarbonate - L=50000mm AT10900



A.39 - End Cap (Kit 2x) - Silver AT09405