



## A.39 Suspension - Structural Module 1482mm - Direct + Indirect Emission - 4000K - Undimmable - White

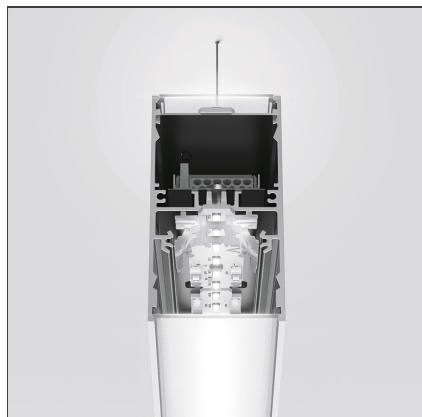

IP20 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

### TECHNICAL DRAWINGS

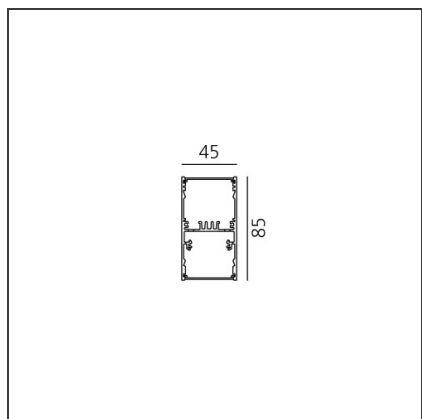

### FEATURES

Article Code:	AT22301	Series:	Indoor
Colour:	White		
Installation:	Ceiling		
Environment:	Indoor		

### DIMENSIONS

Length:	cm 148
Width:	cm 4,5
Height:	cm 8,5

### INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1		
Watt:	42W		
Type:	0		
Class:	A		
Category:	LED	Color temperature (K):	4000K
Number:	1		
Watt:	31W		
Type:	0		
Class:	A		

### LUMINAIRE

Watt:	42W + 31W	Delivered lumens output (lm):	2704lm + 4118lm
		CCT:	4000K
		CRI:	80

ACCESSORIES



A.39 - Mechanical joint including 1 suspension cable  
AT09500



A.39 - End Cap (Kit 2x) - White  
AT09401



A.39 - Opal Diffuser in Polycarbonate - L=10000mm  
AT10000



A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H)  
AT10400



A.39 - Opal Diffuser in Polycarbonate - L=25000mm  
AT10800



A.39 - Opal Diffuser in Polycarbonate - L=50000mm  
AT10900