



# **A.39 Suspension - Structural Module 2368mm - Direct + Indirect Emission - 3000K - Undimmable - Black**

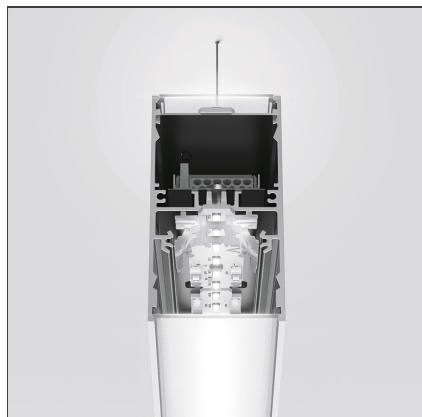

IP20

## **TECHNICAL DRAWINGS**

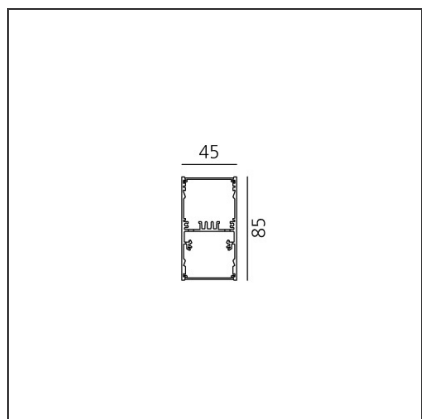

## **DESIGN BY**

Carlotta de Bevilacqua

## **DESCRIPTION**

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

## **FEATURES**

<b>Article Code:</b>	AT23104	<b>Series:</b>	Indoor
<b>Colour:</b>	Black		
<b>Installation:</b>	Ceiling		
<b>Environment:</b>	Indoor		

## **DIMENSIONS**

<b>Length:</b>	cm 237
<b>Width:</b>	cm 4.5
<b>Height:</b>	cm 8.5

## **INCLUDED SOURCES**

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1		
<b>Watt:</b>	50W		
<b>Type:</b>	0		
<b>Class:</b>	A		
<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1		
<b>Watt:</b>	66W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## **LUMINAIRE**

<b>Watt:</b>	66W + 50W	<b>Delivered lumens output (lm):</b>	3785lm + 5912lm
		<b>CCT:</b>	3000K
		<b>CRI:</b>	80

**ACCESSORIES**


A.39 - Mechanical joint including 1 suspension cable  
AT09500



A.39 - End Cap (Kit 2x) - Black  
AT09404



A.39 - Opal Diffuser in Polycarbonate - L=10000mm  
AT10000



A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H)  
AT10400



A.39 - Opal Diffuser in Polycarbonate - L=2368mm  
AT10200



A.39 - Opal Diffuser in Polycarbonate - L=25000mm  
AT10800



A.39 - Opal Diffuser in Polycarbonate - L=50000mm  
AT10900