

# **A.39 Suspension/Ceiling - 1184mm - Direct Emission - 3000K - Undimmable - White**



IP20




## **DESIGN BY**

Carlotta de Bevilacqua

## **DESCRIPTION**

Controlled emission LED optic System. UGR index control and 65° luminance (EN 12464). Patent-pending proprietary optic system made by a thin black square-meshed grid and by a system of square plano-convex lenses of appropriate beam angle. The internal part of the grid is white painted and has a high reflection coefficient, so that the light incident on the grid is retrieved within the A.39 body. A net 'cut off' at the required angle is obtained through this system. The convex profile of the lens is designed with images optic techniques, so that the emission is limited within the 65° required by standard EN 12464. UGR<19 Angle luminance equals to 65° and beyond: <3,000 cd/m2. The grid positioned over the lenses allows only the rays falling into the required output angular limits to be incident to the lenses. The rays beyond these limits are recovered and redirected inside the light box (if the ray is incident to the white surface) or cancelled (if the ray is incident to the black edge).

## **TECHNICAL DRAWINGS**

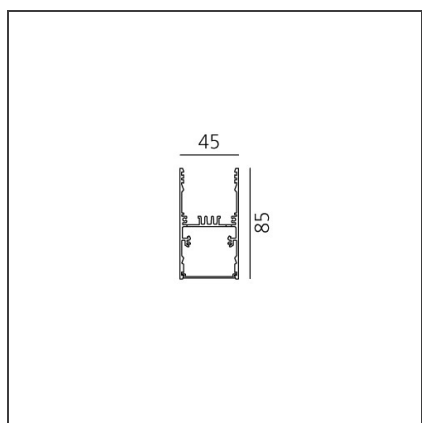

## **FEATURES**

Article Code:	AT13501	Series:	Indoor
Colour:	White		
Installation:	Suspension, Ceiling		

## **DIMENSIONS**

Length:	cm 118
Width:	cm 4.5
Height:	cm 8.5

## **INCLUDED SOURCES**

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	34W		
Type:	0		
Class:	A		

## **LUMINAIRE**

Watt:	34W	Delivered lumens output (lm):	1956lm
		CCT:	3000K
		Efficiency:	42%
		Efficacy:	57.52lm/W
		CRI:	80

## **Notes**

Screen supplied separately. Screen quantity to order: 1x AT09900

ACCESSORIES



A.39 - Mechanical joint including 1 suspension cable AT09500




A.39 - Ceiling bracket and mechanical joint AT09501



End cap kit (2x) - White AT09801



A.39 - End Ceiling Bracket (2x) AT09502



Algoritmo System LED - Optics - Controlled Emission - 1184mm M186700



A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H) AT10400