


A.39 Suspension/Ceiling - Structural Module 1482mm - Direct Emission - 3000K - Undimmable - Silver



IP20

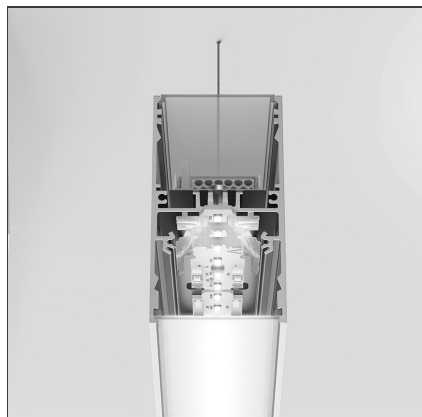


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

TECHNICAL DRAWINGS

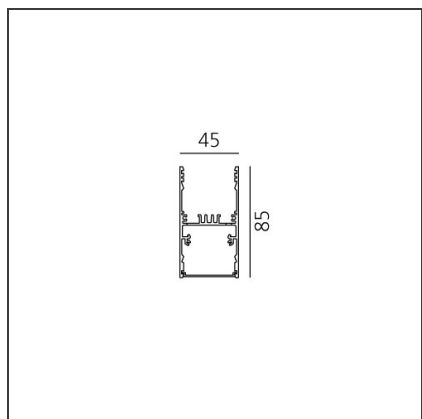

FEATURES

Article Code:	AT14105	Series:	Indoor
Colour:	Silver		
Installation:	Ceiling		
Environment:	Indoor		

DIMENSIONS

Length:	cm 148
Width:	cm 4,5
Height:	cm 8,5

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	42W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	42W	Delivered lumens output (lm):	2366lm
		CCT:	3000K
		CRI:	80

ACCESSORIES

NO
IMAGE
AVAILABLE

A.39 - Mechanical joint including 1 suspension cable
AT09500

NO
IMAGE
AVAILABLE

A.39 - Ceiling bracket and mechanical joint
AT09501

NO
IMAGE
AVAILABLE

A.39 - End Ceiling Bracket (2x)
AT09502

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=10000mm
AT10000

NO
IMAGE
AVAILABLE

A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H)
AT10400

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=25000mm
AT10800

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=50000mm
AT10900

NO
IMAGE
AVAILABLE

A.39 - End Cap (Kit 2x) - Silver
AT09405