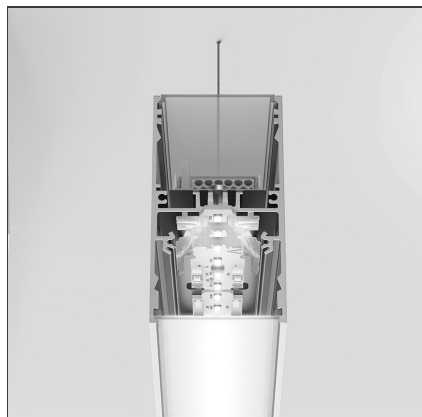



## A.39 Suspension/Ceiling - Structural Module 2368mm - Direct Emission - 4000K - Undimmable - Silver

IP20 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.

### TECHNICAL DRAWINGS

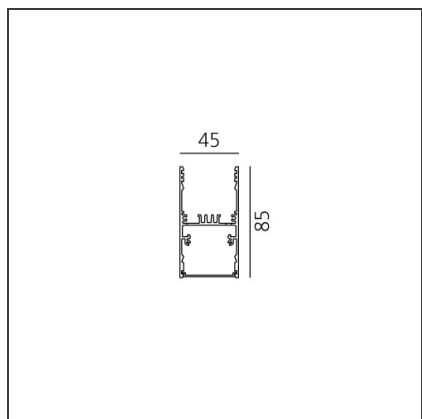

### FEATURES

Article Code:	AT15305	Series:	Indoor
Colour:	Silver		
Installation:	Ceiling		
Environment:	Indoor		

### DIMENSIONS

Length:	cm 237
Width:	cm 4,5
Height:	cm 8,5

### INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1		
Watt:	66W		
Type:	0		
Class:	A		

### LUMINAIRE

Watt:	66W	Delivered lumens output (lm):	3955lm
		CCT:	4000K
		CRI:	80

## ACCESSORIES

NO  
IMAGE  
AVAILABLE

A.39 - Mechanical joint including 1 suspension cable  
AT09500

NO  
IMAGE  
AVAILABLE

A.39 - Ceiling bracket and mechanical joint  
AT09501

NO  
IMAGE  
AVAILABLE

A.39 - End Ceiling Bracket (2x)  
AT09502

NO  
IMAGE  
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=10000mm  
AT10000

NO  
IMAGE  
AVAILABLE

A.39 - Undimmable Feeding kit including 2 suspension cables (3 poles) 2000mm (H)  
AT10400

NO  
IMAGE  
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=2368mm  
AT10200

NO  
IMAGE  
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=25000mm  
AT10800

NO  
IMAGE  
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=50000mm  
AT10900

NO  
IMAGE  
AVAILABLE

A.39 - End Cap (Kit 2x) - Silver  
AT09405