

# A. Sharping Wired Gear Plates Sharping LED Direct Emission + Indirect - 1184mm 53W 36° 3000K



IP20  Dimmerable: 


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Algoritmo Sharping is very flexible and it allows to combine in continuity Sharp light modules, with indirect and diffused LED lighting in warm white (3000K) and neutral white (4000K). Structural modules are in extruded aluminum, available in different lengths depending on the installation option, three finishes (white, black, silver or gloss anodized), two optic finishes (black and white) and three beams (20°, 36° and 52°).

## TECHNICAL DRAWINGS

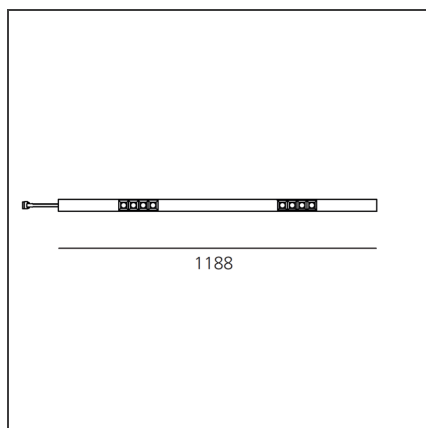

## FEATURES

Article Code:	AE05100	Series:	Indoor
Colour:	White		
Installation:	Recessed, Wall, Suspension, Ceiling		
Environment:	Indoor		

## DIMENSIONS

Length:	cm 118
---------	--------

## INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	53W	Service Life:	L90 (20K) 118000h
Type:	0		
Class:	A		

## LUMINAIRE

Watt:	53W	Delivered lumens output (lm):	4018lm
		CCT:	3000K
		Efficiency:	75%
		Efficacy:	75.81lm/W
		CRI:	90
		Dimmable Typology:	Dali

## Notes

MV integrated through-cable. Protection screen for indirect LED wired plate included.