


**Algoritmo Controlled-Prismoptic Emission - Wired gear plates tunable white
Double emission - 68W 1184mm Dimmable DALI 8 + Prismoptic Optic**

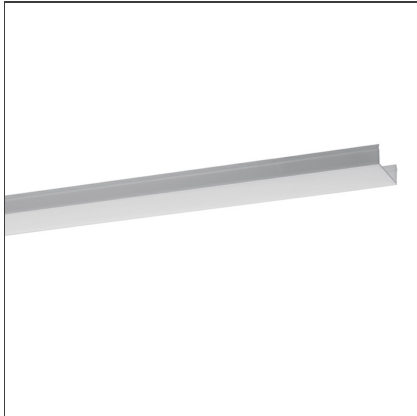

DESIGN BY

Carlotta de Bevilacqua, Paola di Arianello

DESCRIPTION

A modular system for ceiling or wall-recessed installation, to be installed as a continuous line or with angles, composed of structural modules in extruded aluminium, of pre-wired gear plates with through-wiring and quick-connection system of optics systems and components for connecting, fixing, joining or finishing the system. The prewired LED plates were designed for diffused emission, wall washer light, prismoptic or controlled emission, for projectors integration (PAD or Cube 37), for 3 phase track alimентация. Complies with standard EN60598-1 and any other specific standard.

FEATURES

Article Code:	M2991 M196900	Series:	Indoor
Installation:	Recessed, Wall, Suspension, Ceiling		

DIMENSIONS

Length:	cm 118
Weight:	kg 1.1

INCLUDED SOURCES

Category:	LED	Color temperature (K):	2700-5700K
Number:	1		
Watt:	68W		
Type:	1		
Class:	A		

LUMINAIRE

Watt:	68W	CCT:	2700K - 5700K
		Dimmable Typology:	Dali

ACCESSORIES



Electronic power supply. IP67. Input voltage range: 90-264VAC / 47-63Hz. Output voltage: 48VDC. Protection against overcurrent, overvoltage, short-circuit and overtemperature, with automatic restart. - 240W. For feeding up to a total 225W. 244x68x39mm. M075100



Electrical connector (only for RGB LED) to couple wall-surface or floor-recessed LED Algoritmo System modules, powered through the same electrical circuit. M221900



Supply Kit. Allows for connection of the mains to the first pre-wired gear plate of the initial module. To be used only with recessed and surface installation. - MV (7xmax 1,5 mm²) To power white LED plates and accent modules. M073240



Supplementary through-wiring (optional). To be used in mixed configuration with LV and MV pre-cabled gear trays. - MV 1184mm. M198700



Control Interface. Form managing groups of Algoritmo System LED RGB and/or white LED/RGB Algoritmo Floor lighting units. Integrated sequencer for stand-alone operation with predefined color sequence. Possibility of master-slave configuration. DALI DMX light management systems are not included. - Compatible DALI 310X168X90 mm. IP67 M077000




Control Interface. Form managing groups of Algoritmo System LED RGB and/or white LED/RGB Algoritmo Floor lighting units. Integrated sequencer for stand-alone operation with predefined color sequence. Possibility of master-slave configuration. DALI DMX light management systems are not included. - Compatible DALI. Suitable for DIN rail mounting. 106x90x70 mm. IP20 M077200



Unità di controllo tunable white M2979



Supplementary through-wiring (optional). To be used in mixed configuration with LV and MV pre-cabled gear trays. - LV 1184mm. M198800



Algoritmo System LED - Optics - Prismoptic - 1184mm M196900 Electronic power supply. IP67. Input voltage range: 90-



264VAC / 47-63Hz.
 Output voltage:
 48VDC. Protection
 against
 overcurrent,
 overvoltage, short-
 circuit and
 overtemperature,
 with automatic
 restart. - 320W.
 For feeding up to
 a total 300W.
 252x90x44mm.
 M076100



Electronic power
 supply. IP67. Input
 voltage range: 90-
 264VAC / 47-63Hz.
 Output voltage:
 48VDC. Protection
 against
 overcurrent,
 overvoltage, short-
 circuit and
 overtemperature,
 with automatic
 restart. 100W. For
 feeding up to a
 total 90W.
 220x68x38mm.
 M075000



Movement
 detector - 296mm
 DALI
 M2981



Control Interface.
 Form managing
 groups of
 Algoritmo System
 LED RGB and/or
 white LED/RGB
 Algoritmo Floor
 lighting units.
 Integrated
 sequencer for
 stand-alone
 operation with
 predefined color
 sequence.
 Possibility of
 master-slave
 configuration.
 DALI DMX light
 management
 systems are not
 included. -
 Compatible DALI
 or DMX
 310X168X90 mm.
 IP67
 M077100



Control Interface.
 Form managing
 groups of
 Algoritmo System
 LED RGB and/or
 white LED/RGB
 Algoritmo Floor
 lighting units.
 Integrated
 sequencer for
 stand-alone
 operation with
 predefined color
 sequence.
 Possibility of
 master-slave
 configuration.
 DALI DMX light
 management
 systems are not
 included. -
 Compatible DALI
 or DMX. Suitable
 for DIN rail
 mounting.
 106x90x70 mm.



Supply Kit. Allows
 for connection of
 the mains to the
 first pre-wired
 gear plate of the
 initial module. To
 be used only with
 recessed and
 surface
 installation. - LV
 (3xmax 1,5 mm2)
 To power LED RGB
 trays.
 M073230

IP20
M077300