


# Calipso Linear System 180 Suspension

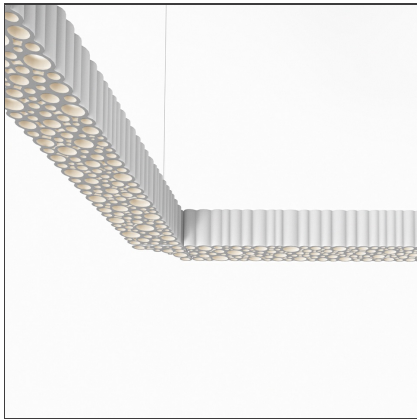


IP20  Dimmerable: 

## DESIGN BY

Neil Poulton

## TECHNICAL DRAWINGS

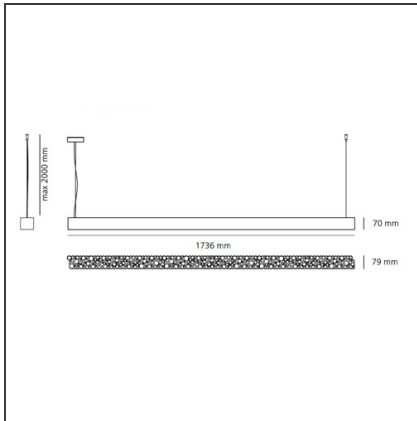

## FEATURES

|                      |                     |                  |                                  |
|----------------------|---------------------|------------------|----------------------------------|
| <b>Article Code:</b> | 2015010A            | <b>Material:</b> | Technopolymer, aluminium         |
| <b>Colour:</b>       | White               | <b>Series:</b>   | Design, 2018 Artemide Collection |
| <b>Installation:</b> | Ceiling, Suspension |                  |                                  |
| <b>Environment:</b>  | Indoor              |                  |                                  |

## DIMENSIONS

|                                 |        |
|---------------------------------|--------|
| <b>Length:</b>                  | cm 173 |
| <b>Width:</b>                   | cm 7.9 |
| <b>Height:</b>                  | cm 7   |
| <b>Max Height from ceiling:</b> | cm 200 |

## INCLUDED SOURCES


|                                      |        |                               |           |
|--------------------------------------|--------|-------------------------------|-----------|
| <b>Category:</b>                     | LED    | <b>Color temperature (K):</b> | 3000K     |
| <b>Number:</b>                       | 1      | <b>CRI:</b>                   | 90        |
| <b>Watt:</b>                         | 58,3W  | <b>Efficacy:</b>              | 123lm/W   |
| <b>Delivered lumens output (lm):</b> | 7200lm | <b>Service Life:</b>          | 50000-L70 |
| <b>Type:</b>                         | 0      |                               |           |
| <b>Class:</b>                        | A      |                               |           |

## LUMINAIRE


|              |     |                                      |        |
|--------------|-----|--------------------------------------|--------|
| <b>Watt:</b> | 69W | <b>Delivered lumens output (lm):</b> | 3960lm |
|              |     | <b>CCT:</b>                          | 3000K  |
|              |     | <b>Efficiency:</b>                   | 55%    |
|              |     | <b>Efficacy:</b>                     | 57lm/W |
|              |     | <b>CRI:</b>                          | 90     |
|              |     | <b>Dimmable Typology:</b>            | Push   |

## Notes


Uniform and diffuse light suitable for workplaces UGR<19

**ACCESSORIES**


Calipso System  
end cap kit (2 pcs)  
2022010A



Calipso System  
Joint kit (dx+sx)  
2023010A



Calipso System  
Suspension kit  
2021010A



Calipso System  
Powered  
Suspension kit  
2020010A