


# Cariddi 30 - 16° 3000K



IP65

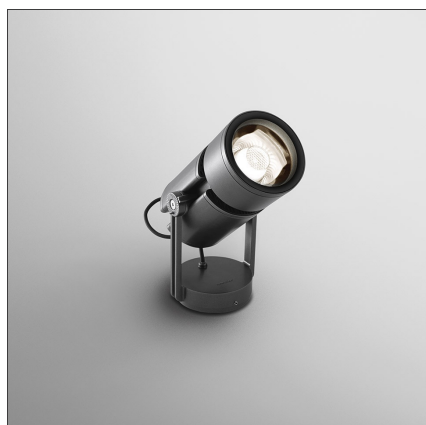


## DESIGN BY

Ernesto Gismondi

## DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base  $\pm 180^\circ$ , body tilting  $\pm 130^\circ$ . Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

## TECHNICAL DRAWINGS

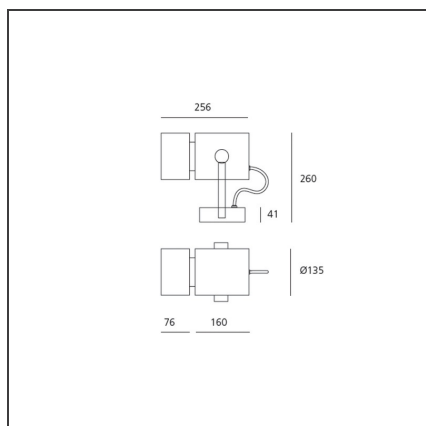

## FEATURES

<b>Article Code:</b>	T418620W00	<b>Material:</b>	Aluminum, tempered glass, methacrylate
<b>Colour:</b>	Grey antracite	<b>Series:</b>	Outdoor
<b>Installation:</b>	Floor, Wall, Ceiling		

## DIMENSIONS

<b>Length:</b>	cm 25.6	<b>Impact Resistance:</b>	IK07
<b>Width:</b>	cm 16.2	<b>Glow Wire Test:</b>	750
<b>Height:</b>	cm 26		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1		
<b>Watt:</b>	28W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	28W	<b>Delivered lumens output (lm):</b>	1638lm
<b>Voltage:</b>	220V-240 V	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	100%
		<b>Efficacy:</b>	58.50lm/W
		<b>CRI:</b>	80