

# Cata TIR Ceiling - 4000K + Lens Wall Washer



IP20  Dimmerable: 


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. 2 beam angles: 2x3,5°, 2x8°. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

## TECHNICAL DRAWINGS

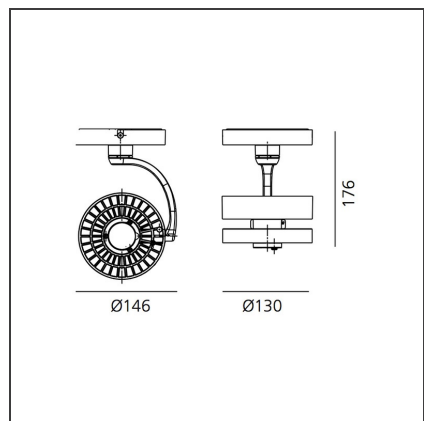

## FEATURES

Article Code:	M0569N81 M109900	Series:	Indoor
Colour:	Polished aluminium		
Installation:	Track, Suspension, Ceiling		

## DIMENSIONS

Height:	cm 17.6
Weight:	kg 0.8
Base Diameter:	cm 13
Inclination:	-90+90
Rotation:	cm 360

## INCLUDED SOURCES

Category:	LED	Color temperature (K):	4000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	22W	CRI:	90
Type:	0	Service Life:	L70(6K) 36000h
Class:	A		

## LUMINAIRE

Watt:	22W	Delivered lumens output (lm):	1734lm
		CCT:	4000K
		Efficiency:	89%
		Efficacy:	78.80lm/W
		CRI:	90

## Notes


If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

**ACCESSORIES**


Accessories holder  
M057080




Adjustable  
dowsers  
M059910




Lens for elliptical  
emission  
M282007



Chromatic filter  
yellow  
M281745




Chromatic filter  
red  
M281755



Chromatic filter  
blue  
M281735



Anti-dazzle louvre  
M282100



Soft filter  
M056807