

Cata TIR Suspension - 4000K + Lens 16°



IP20  Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. 2 beam angles: 2x3,5°, 2x8°. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

TECHNICAL DRAWINGS

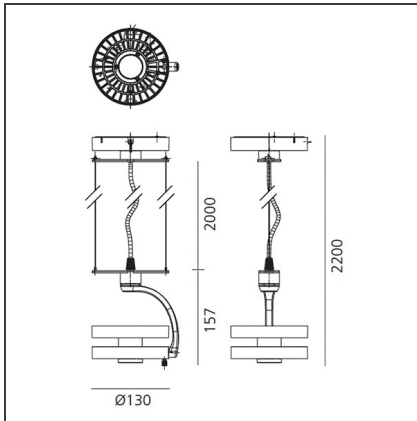

FEATURES

| | | | |
|----------------------|----------------------------|----------------|--------|
| Article Code: | M0671N81 M109600 | Series: | Indoor |
| Colour: | Polished aluminium | | |
| Installation: | Track, Suspension, Ceiling | | |

DIMENSIONS

| | |
|---------------------------------|----------|
| Height: | cm 15.7 |
| Weight: | kg 0.8 |
| Base Diameter: | cm 13 |
| Inclination: | -90+90 |
| Rotation: | cm 360 |
| Max Height from ceiling: | cm 2,000 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|----------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 22W | CRI: | 90 |
| Type: | 0 | Service Life: | L70(6K) 36000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|-----------|
| Watt: | 22W | Delivered lumens output (lm): | 1758lm |
| | | CCT: | 4000K |
| | | Efficiency: | 90% |
| | | Efficacy: | 79.89lm/W |
| | | CRI: | 90 |

Notes


If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

ACCESSORIES


Accessories holder
M057080




Adjustable
dowers
M059910




Lens for elliptical
emission
M282007



Chromatic filter
yellow
M281745




Chromatic filter
red
M281755



Chromatic filter
blue
M281735



Anti-dazzle louvre
M282100



Soft filter
M056807