

## Cata Track Tunable White



IP20  **TW** Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. 2 beam angles: 2x3,5°, 2x8°. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

### TECHNICAL DRAWINGS

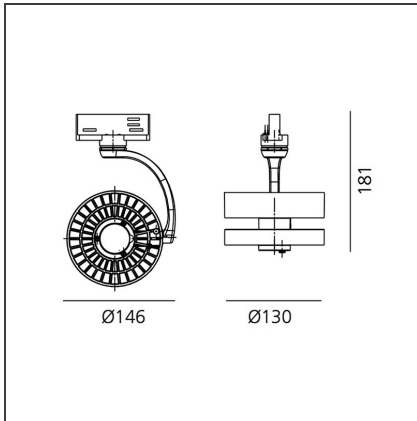

### FEATURES

<b>Article Code:</b>	M057783	<b>Series:</b>	Indoor
<b>Colour:</b>	Polished aluminium		
<b>Installation:</b>	Projector, Track, Suspension, Ceiling		
<b>Environment:</b>	Indoor		

### DIMENSIONS

<b>Height:</b>	cm 18.1	<b>Glow Wire Test:</b>	850
<b>Weight:</b>	kg 0.7		
<b>Base Diameter:</b>	cm 13		
<b>Inclination:</b>	-90+90		
<b>Rotation:</b>	cm 360		

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700-5700
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	22W	<b>CRI:</b>	>93 (min.)
<b>Type:</b>	1	<b>Service Life:</b>	L70 (6K) 50000h
<b>Class:</b>	A		

### LUMINAIRE

<b>Watt:</b>	22W	<b>Delivered lumens output (lm):</b>	404lm
		<b>CCT:</b>	2700-5700 K
		<b>Efficiency:</b>	61%
		<b>Efficacy:</b>	36 lm/W-39 lm/W
		<b>CRI:</b>	>93
		<b>Dimmable Typology:</b>	Dali

### Notes

If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

**ACCESSORIES**

Optical unit 2x12°  
M057600



Optical unit 2x6°  
M057500



Optical wide 64°  
M057800