


Dedalo IP40 240 LED RGB

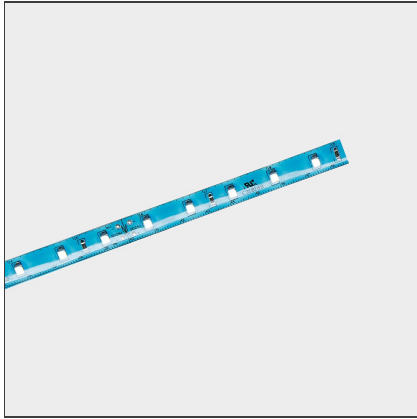

IP40  


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation. Flexible profile. Flexible UV-resistant polyurethane resin rim. Accurate led selection equal to 3 Step MacAdam, ensuring colour consistency. 3M adhesive film to fix the product, supplied with the fixture. Remote driver. Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3200K Neutral = 3800K RGB Full colour LED. IP Rating IP65 or IP40. Insulation class III. Operating temperature -20°C / +40°C. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

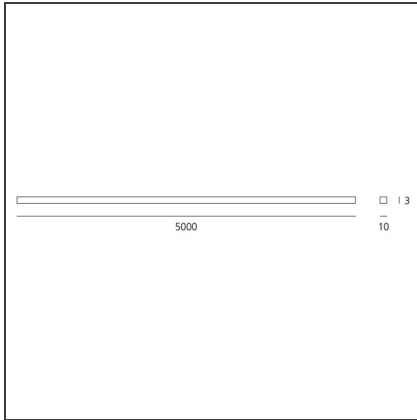

FEATURES

Article Code:	NL17036	Series:	Outdoor
Installation:	Floor, Wall, Ceiling		
Environment:	Outdoor		

DIMENSIONS

Length:	cm 500
Width:	cm 1.2
Height:	cm 0,3
Weight:	kg 0.5

INCLUDED SOURCES

Category:	LED
Number:	1
Watt:	60W
Type:	3
Class:	A

LUMINAIRE

Power Supply:	Electronic supplied separately	CCT:	RGB
Watt:	60W	CRI:	80

ACCESSORIES

NO
IMAGE
AVAILABLE

CAVO
COLLEGAMENTO
TASTIERA
ESTERNA
NL7833

NO
IMAGE
AVAILABLE

DSC30 interfaccia
USB - DMX stand
alone microled
NL19030

NO
IMAGE
AVAILABLE

Alimentatore
9V/350mA con
connettore mini
USB per DSC30
NL19031