


Dedalo IP40 600 LED

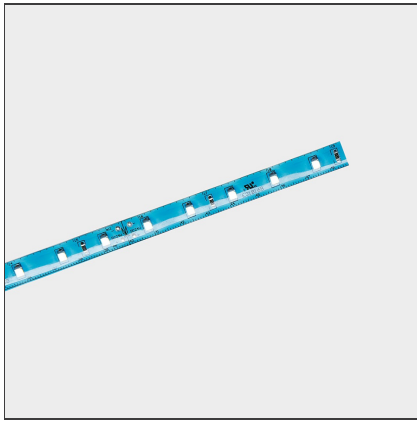

IP40  CE


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation. Flexible profile. Flexible UV-resistant polyurethane resin rim. Accurate led selection equal to 3 Step MacAdam, ensuring colour consistency. 3M adhesive film to fix the product, supplied with the fixture. Remote driver. Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3200K Neutral = 3800K RGB Full colour LED. IP Rating IP65 or IP40. Insulation class III. Operating temperature -20°C / +40°C. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

TECHNICAL DRAWINGS

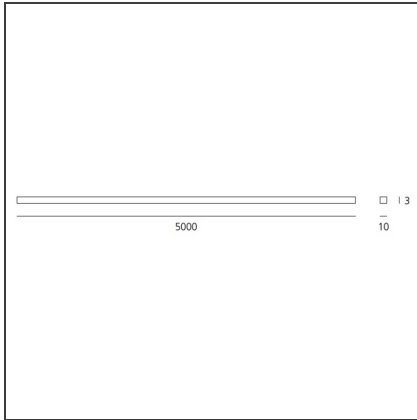

FEATURES

Article Code:	NL17032VTK1	Series:	Outdoor
Installation:	Floor, Wall, Ceiling		
Environment:	Outdoor		

DIMENSIONS

Length:	cm 500
Width:	cm 1.2
Height:	cm 0,3
Weight:	kg 0.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3200K
Number:	1	CRI:	= 80(min)
Watt:	48W		
Type:	0		
Class:	A		

LUMINAIRE

Power Supply:	Electronic supplied separately	Delivered lumens output (lm):	2202lm
Watt:	48W	CCT:	3200K
		Efficacy:	46lm/W
		CRI:	80

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc
NL87110

NO
IMAGE
AVAILABLE

ALIMENT. 40W
24Vdc IP67
NL62040

NO
IMAGE
AVAILABLE

DEDALO KIT
CONNETTORI
NL170330

NO
IMAGE
AVAILABLE

ALIMENT. 70W
24Vdc IP67
NL89080

NO
IMAGE
AVAILABLE

ALIMENT. 150W
24Vdc IP67
NL62880