


## Dedalo - IP65 - 24W 3200K

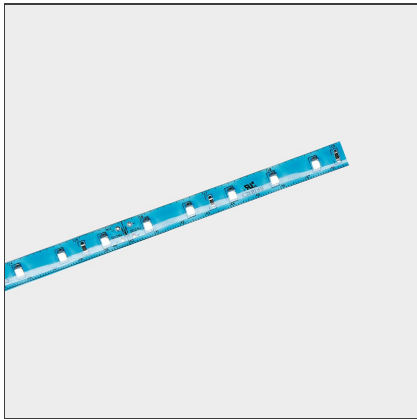

IP65  


### DESIGN BY

Studio Artemide

### DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation. Flexible profile. Flexible UV-resistant polyurethane resin rim. Accurate led selection equal to 3 Step MacAdam, ensuring colour consistency. 3M adhesive film to fix the product, supplied with the fixture. Remote driver. Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3200K Neutral = 3800K RGB Full colour LED. IP Rating IP65 or IP40. Insulation class III. Operating temperature -20°C / +40°C. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

### TECHNICAL DRAWINGS

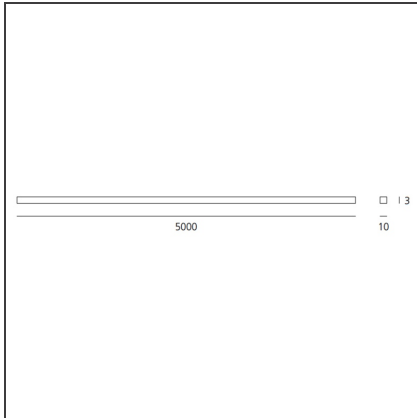

### FEATURES

<b>Article Code:</b>	NL17034VTK0	<b>Series:</b>	Outdoor
<b>Installation:</b>	Floor, Wall, Ceiling		
<b>Environment:</b>	Outdoor		

### DIMENSIONS

<b>Length:</b>	cm 500
<b>Width:</b>	cm 1.2
<b>Height:</b>	cm 0,3
<b>Weight:</b>	kg 0.4

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3200K
<b>Number:</b>	1	<b>CRI:</b>	CRI = 80(min)
<b>Watt:</b>	24W		
<b>Delivered lumens output (lm):</b>	1104lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

### LUMINAIRE

<b>Power Supply:</b>	Electronic supplied separately	<b>Delivered lumens output (lm):</b>	1104lm
<b>Watt:</b>	24W	<b>CCT:</b>	3200K
		<b>Efficacy:</b>	46lm/W
		<b>CRI:</b>	80

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc  
NL87110

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W  
24Vdc IP67  
NL62040

NO  
IMAGE  
AVAILABLE

DEDALO KIT  
CONNETTORI  
NL170330

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880