


## Dedalo -IP65 - RGB 60W

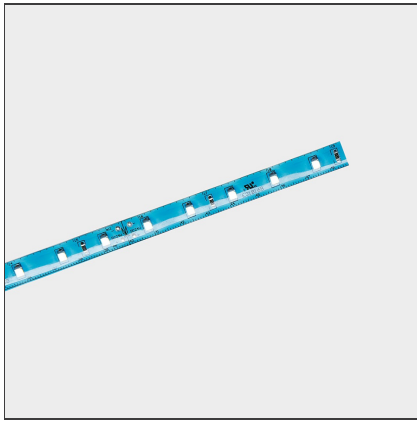

IP65  


### DESIGN BY

Studio Artemide

### DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation. Flexible profile. Flexible UV-resistant polyurethane resin rim. Accurate led selection equal to 3 Step MacAdam, ensuring colour consistency. 3M adhesive film to fix the product, supplied with the fixture. Remote driver. Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture. White monochromatic LEDs available in 2 colour temperatures: Warm = 3200K Neutral = 3800K RGB Full colour LED. IP Rating IP65 or IP40. Insulation class III. Operating temperature -20°C / +40°C. Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

### TECHNICAL DRAWINGS

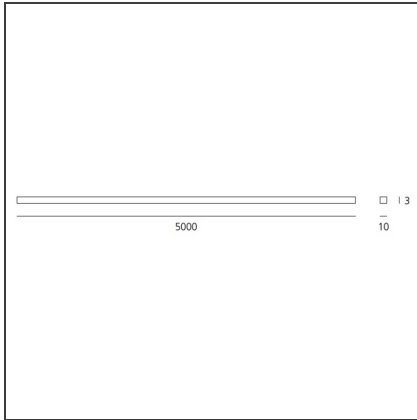

### FEATURES

<b>Article Code:</b>	NL17037	<b>Series:</b>	Outdoor
<b>Installation:</b>	Floor, Wall, Ceiling		
<b>Environment:</b>	Outdoor		

### DIMENSIONS

<b>Length:</b>	cm 500
<b>Width:</b>	cm 1.2
<b>Height:</b>	cm 0,3
<b>Weight:</b>	kg 0.5

### INCLUDED SOURCES

<b>Category:</b>	LED
<b>Number:</b>	1
<b>Watt:</b>	60W
<b>Type:</b>	3
<b>Class:</b>	A

### LUMINAIRE

<b>Power Supply:</b>	Electronic supplied separately	<b>CCT:</b>	RGB
<b>Watt:</b>	60W	<b>CRI:</b>	80

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

CAVO  
COLLEGAMENTO  
TASTIERA  
ESTERNA  
NL7833

NO  
IMAGE  
AVAILABLE

DSC30 interfaccia  
USB - DMX stand  
alone microled  
NL19030

NO  
IMAGE  
AVAILABLE

Alimentatore  
9V/350mA con  
connettore mini  
USB per DSC30  
NL19031